



AU-DQ-P2

SPECIFICATION

HOUSING :HIGH COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT POLYESTER POWDER COAT

REFLECTOR :HIGH GRADE ANODIZED ALUMINIUM REFLECTOR (SANDBLAST)

DIFFUSER :VANDAL RESISTANT TEMPERED GLASS (FOR HI-DQ-TX CDM-T LAMP)

FRAME :STEEL WITH POLYESTER POWDER COAT

LAMP RING :DIE CAST ALUMINIUM


COLOR :WHITE, BLACK, SILVER

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :RECESS CONCEAL CEILING

APPLICATION :BUILDING, HOSPITAL, DEPARTMENT STORE, HOTEL RESTAURANT, SHOWROOM, SHOP, RESIDENTIAL ETC.

MODEL	DIMENSION(mm.)			CUT OUT(mm.)		LAMP	LUMEN	LAMP TYPE
	L	W	H	L	W	HOLDER	(MAX)	
AU-DQ-P2	346	196	168	325	175	E 27 x 2	6900 cd.	2 x PAR30 75W.
							68000 cd.	2 x CDM - R 35, 70W.

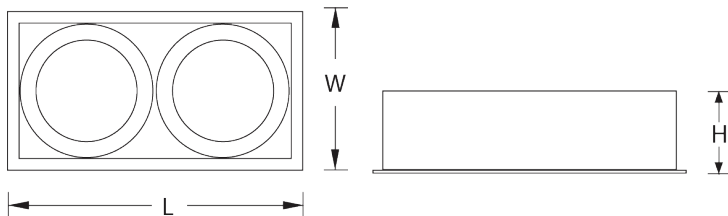



AU-DQ-T2

SPECIFICATION

HOUSING :HIGH COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT POLYESTER POWDER COAT

REFLECTOR :HIGH GRADE ANODIZED ALUMINIUM REFLECTOR (SANDBLAST)

DIFFUSER :VANDAL RESISTANT TEMPERED GLASS (FOR HI-DQ-TX CDM-T LAMP)

FRAME :STEEL WITH POLYESTER POWDER COAT

LAMP RING :DIE CAST ALUMINIUM

COLOR :WHITE, BLACK, SILVER

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :RECESS CONCEAL CEILING

APPLICATION :BUILDING, HOSPITAL, DEPARTMENT STORE, HOTEL RESTAURANT, SHOWROOM, SHOP, RESIDENTIAL ETC.

MODEL	DIMENSION(mm.)			CUT OUT(mm.)		LAMP	LUMEN	LAMP TYPE
	L	W	H	L	W	HOLDER	(MAX)	
AU-DQ-T2	346	196	168	325	175	G 12 x 2	14000 lm.	2 x CDM - T 35, 70, 150W.

