



AU-DQ

SPECIFICATION

HOUSING :HIGH COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT POLYESTER POWDER COAT

REFLECTOR :HIGH GRADE ANODIZED ALUMINIUM REFLECTOR (SANDBLAST)

DIFFUSER :VANDAL RESISTANT TEMPERED GLASS (FOR HI-DQ-TX CDM-T LAMP)

FRAME :STEEL WITH POLYESTER POWDER COAT

LAMP RING :DIE CAST ALUMINIUM




COLOR :WHITE, BLACK, SILVER

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :RECESS CONCEAL CEILING

APPLICATION :BUILDING, HOSPITAL, DEPARTMENT STORE, HOTEL RESTAURANT, SHOWROOM, SHOP, RESIDENTIAL ETC.

MODEL	DIMENSION(mm.)			CUT OUT(mm.)		LAMP	LUMEN (MAX)	LAMP TYPE
	L	W	H	L	W	HOLDER		
AU-DQ-P3	486	196	168	465	175	E 27 x 3	6900 cd.	3 x PAR30 75W.
							68000 cd.	3 x CDM - R 35, 70W.
AU-DQ-P4	626	196	168	600	175	E 27 x 4	6900 cd.	4 x PAR30 75W.
							68000 cd.	4 x CDM - R 35, 70W.
AU-DQ-P4X	346	346	168	325	325	E 27 x 4	6900 cd.	4 x PAR30 75W.
							68000 cd.	4 x CDM - R 35, 70W.

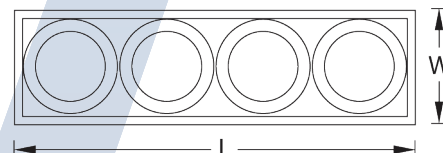



AU-DQ

SPECIFICATION

HOUSING :HIGH COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT POLYESTER POWDER COAT

REFLECTOR :HIGH GRADE ANODIZED ALUMINIUM REFLECTOR (SANDBLAST)

DIFFUSER :VANDAL RESISTANT TEMPERED GLASS (FOR HI-DQ-TX CDM-T LAMP)

FRAME :STEEL WITH POLYESTER POWDER COAT

LAMP RING :DIE CAST ALUMINIUM

COLOR :WHITE, BLACK, SILVER

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :RECESS CONCEAL CEILING

APPLICATION :BUILDING, HOSPITAL, DEPARTMENT STORE, HOTEL RESTAURANT, SHOWROOM, SHOP, RESIDENTIAL ETC.

MODEL	DIMENSION(mm.)			CUT OUT(mm.)		LAMP	LUMEN (MAX)	LAMP TYPE
	L	W	H	L	W	HOLDER		
AU-DQ-T3	486	196	168	465	175	G 12 x 3	14000 lm.	3 x CDM - T 35, 70, 150W.
AU-DQ-T4	626	196	168	600	175	G 12 x 4	14000 lm.	4 x CDM - T 35, 70, 150W.
AU-DQ-T4X	346	346	168	325	325	G 12 x 4	14000 lm.	4 x CDM - T 35, 70, 150W.

