
light PLUS

FLUORESCENT


WIRE GUARD BATTEN TYPE

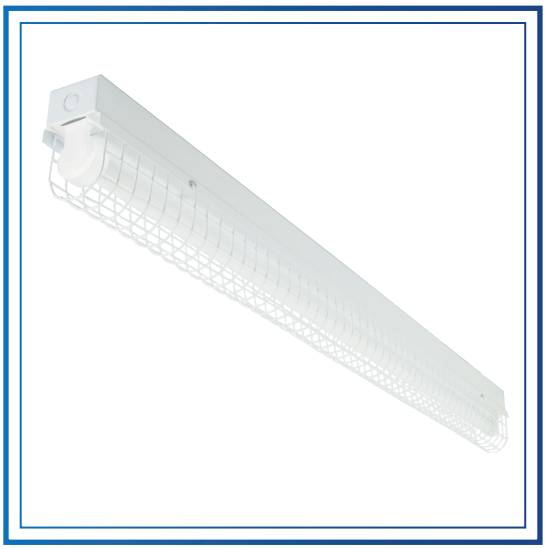

LPF G1-120-140 WP

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:WHITE STOVED ENAMELLED WIRE GUARD
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER W/P	:WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY,IEC 60400/VDE 0615 PART 3, UL
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 44
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, CARPARK, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

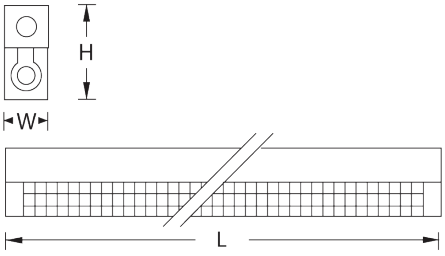

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF G1-120 WP	1 x 18W. T8	635	67	118	2.30
LPF G1-140 WP	1 x 36W. T8	1245	67	118	2.90
LPF G1-132 WP	1 x 32W. T8	1245	67	118	2.90

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT