light PLUS

FLUORESCENT


SURFACE MOUNTED OPEN TYPE



LPF LBR

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 20
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, FACTORY SHOP, WAREHOUSE, CANTEEN, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

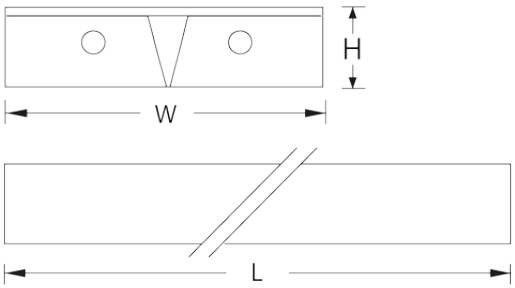

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPFLBR-120A	1 x 18W. T8	630	200	95	3.50
LPFLBR-120B	1 x 18W. T8	630	300	95	4.30
LPFLBR-220A	2 x 18W. T8	630	300	95	4.60
LPFLBR-220B	2 x 18W. T8	630	600	95	7.60
LPFLBR-140A	1 x 36W. T8	1225	200	95	6.40
LPFLBR-140B	1 x 36W. T8	1225	300	95	6.90
LPFLBR-240A	2 x 36W. T8	1225	300	95	7.30
LPFLBR-240B	2 x 36W. T8	1225	600	95	11.60
LPFLBR-228A	2 x 36W. T5	1170	300	70	6.25

INSTALLATION : SURFACE OR SUSPEND MOUNT