
light PLUS

FLUORESCENT

U-SHAPE ACRYLIC COVER TYPE


CLEAR


STIPPLE


OPAL

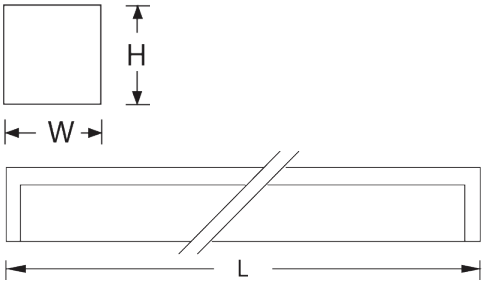

PRISMATIC



LPF U1-220-240

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY
DIFFUSER	:OPAL ACRYLIC (OP), CLEARACRYLIC (CL), STIPPLE ACRYLIC (ST), PRISMATIC ACRYLIC (PR)
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
	:WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, IEC 60400/VDE 0615 PART3. UL
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 44
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, FACTORY SHOP, WAREHOUSE, RESIDENTIAL, TOILET, CANTEEN CLEAN ROOM, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP



MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF U1-220	2 x 18W. T8	635	200	70	4.20
LPF U1-228	2 x 28W. T8	1245	200	70	5.80
LPF U1-240	2 x 36W. T8	1245	200	70	6.70
LPF U1-232	2 x 32W. T8	1245	200	70	6.70

INSTALLATION : SURFACE OR SUSPEND MOUNT