
FLUORESCENT


U-SHAPE ACRYLIC COVER TYPE

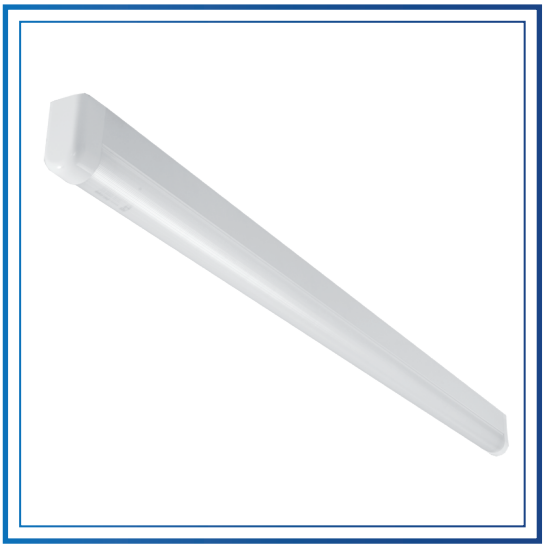

LPF U2

SPECIFICATION

HOUSING	:(HI-FU2-XXXA) HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES :(HI-FU2-XXXB) EXTRUDED ALUMINIUM
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR (DIN 5036-3) FROM GERMANY
DIFFUSER	:EXTRUDED ACRYLIC RIBBED PATTERN ON INSIDE FOR EVIEN DIFFUSION
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKED TYPE HIGH-HEATRESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 44
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARMENT STORE HOTEL, UNIVERSITY, FACTORY, SHOP, WAREHOUSE RESIDENTIAL, TOILET, CANTEEN, CLEAN ROOM ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 & T5 LAMP

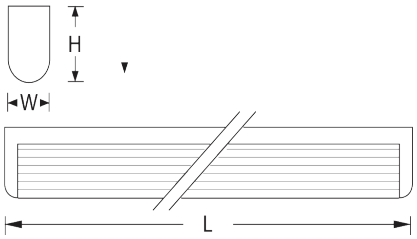

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF U2-120A	1 x 18W. T8	650	43	75	1.50
LPF U2-140A	1 x 36W. T8	1260	43	75	2.20
LPF U2-120B	1 x 18W. T8	650	43	75	1.60
LPF U2-140B	1 x 36W. T8	1260	43	75	2.35

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT