
FLUORESCENT

U-SHAPE ACRYLIC COVER TYPE

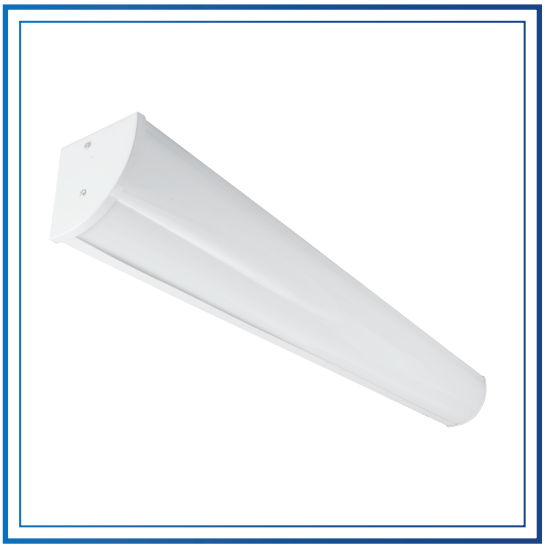


OPAL

PRISMATIC

LPF U3

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR (DIN 5036-3) FROM GERMANY
DIFFUSER	:OPAL ACRYLIC (OP), PRISMATIC ACRYLIC (PR)
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKED TYPE HIGH-HEATRESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 44
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:OFFICE BUILDING, HOSPITAL, RESTAURANT,SHOP RESIDENTIAL, TOILET, CANTEEN, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

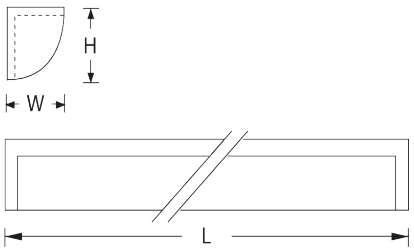

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF U3-120	1 x 18W. T8	620	110	110	2.30
LPF U3-140	1 x 36W. T8	1230	110	110	3.70
LPF U3-132	1 x 32W. T8	1230	110	110	3.70

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT