light PLUS

FLUORESCENT


OPEN FRONTED TYPE



LPF V1-120-140 WP

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER W/P	:WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORDING TO IEC 60400/VDE 0615 PART3. UL (INSECT PROOF LAMP)
STARTER HOLDER	:ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 44
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, CANTEEN, CLEAN ROOM ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP
COMPLETE SET**	:INCLDING ELECTRONIC BALLAST,LAMP FOR T5 LAMP

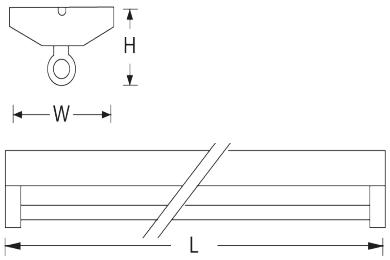

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
					(kg.)
LPF V1-120 WP	1 x 18W. T8	635	152	105	1.85
LPF V1-128 WP	1 x 28W. T8	1245	152	105	2.55
LPF V1-140 WP	1 x 36W. T8	1245	152	105	2.55

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT