light PLUS

FLUORESCENT


V-SHAPE TYPE



LPF V3-V4

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER W/P	:WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORDING TO IEC 60400/VDE 0615 PART3. UL (INSECT PROOF LAMP)
STARTER HOLDER	:ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 44
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, CANTEEN, CLEAN ROOM ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

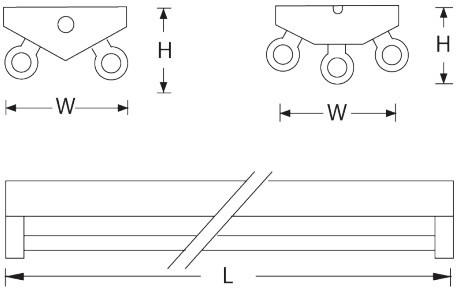

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF V3-220 WP	2 x 18W. T8	635	220	95	3.10
LPF V3-240 WP	2 x 36W. T8	1245	220	95	4.40
LPF V4-320 WP	3 x 18W. T8	635	240	115	4.10
LPF V4-340 WP	3 x 36W. T8	1245	240	115	6.20

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT