light PLUS

FLUORESCENT


V-SHAPE TYPE



LPF V3-V4

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:SPRING LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
	:ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 20
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, OFFICE BUILDING, DEPARTMENT STORE, CANTEEN, RESIDENTIAL, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP
COMPLETE SET**	:INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP

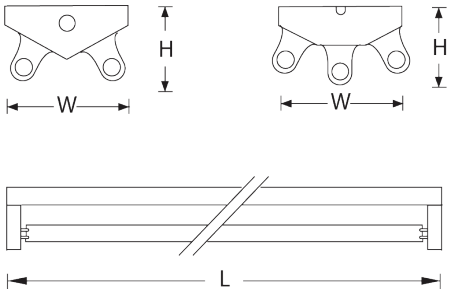

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF V3-220	2 x 18W. T8	635	220	70	3.20
LPF V3-232	2 x 32W.T8	1245	220	70	4.50
LPF V3-240	2 x 36W. T8	1245	220	70	4.50
LPF V4-320	3 x 18W. T8	635	250	110	4.25
LPF V4-340	3 x 36W. T8	1245	250	110	6.30
LPF V5-440	4 x 36W. T8	1245	340	110	6.70

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT