FLUORESCENT

EXPLOSIONPROOF TYPE




LPF XP3

SPECIFICATION

HOUSING	:FIBER-GLASS REINFORCED POLYESTER
	:SILICONE GASKET
DIFFUSER	:CLEAR POLYCARBONATE
INSTALLATION	:SURFACE OR SUSPEND MOUNT

PERMISSIBLE AMBIENTTEMPERATURE	: -20 C TO +40 C
POWER FACTOR	:> 0.95
COMPLETE SET*	:INCLUDING ELECTRONIC BALLAST, LAMP

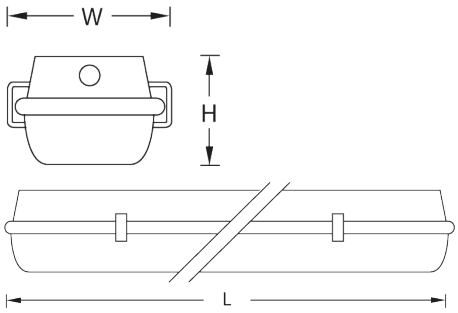

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF XP3-120	1 x 36W. T8	1360	188	130	6.70
LPF XP3-240	2 x 36W. T8	1360	188	130	8.50
LPF XP3-158	1 x 58W. T8	1360	188	130	7.30
LPF XP3-258	2 x 58W. T8	1360	188	130	9.80

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT