light PLUS

FLUORESCENT


COLD STORAGE ROOM -30° TYPE



LPF G10

SPECIFICATION

HOUSING	:GLASS OF REINFROCED POLYESTER RIGID EVEN AT HIGHER TEMPERATURE
	:STAINLESS STEEL CLIPS
	:EXPANDED AND INJECTED POLYURETHANE SEAL FOR EFFECTIVE SEALING BETWEEN BODY AND DIFFUSER
REFRECTOR	:STEEL SHEET MATERIAL, POWDER COATED WITE UV-PROTECTION
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5036-3)FROM GERMANY
	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5036-3)FROM GERMANY
DIFFUSER	:POLYCARBONATE
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKET TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP65 CLASS I
COLOR	:GREY
INSTALLATION	:SURFACE OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, CLEANROOM, ETC.
	:CAN BE USE IN COLD STORAGE ROOM -30 C AMBINET TEMPERATURE
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

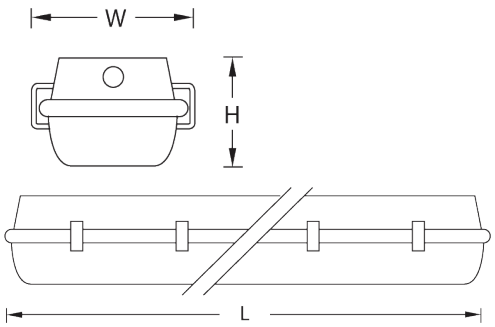

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF G10-140	1 x 36W. T8	1310	110	108	4.20
LPF G10-240	2 x 36W. T8	1310	170	108	6.30
LPF G10-158	1 x 58W. T8	1580	110	108	6.40
LPF G10-258	2 x 58W. T8	1580	170	108	8.20

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT