light PLUS

FLUORESCENT


WATER PROOF&COLD STORAGE ROOM TYPE



LPF G8

SPECIFICATION

HOUSING	:MADE OF REINFROCED POLYESTER RIGID EVEN AT HIGHER TEMPERATURE
	:STAINLESS STEEL CLIPS
	:EXPANDED AND INJECTED POLYURETHANE SEAL FOR EFFECTIVE SEALING BETWEEN BODY AND DIFFUSER
REFRECTOR	:STEEL SHEET MATERIAL, POWDER COATED WITE UV-PROTECTION
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5036-3)FROM GERMANY
	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5036-3)FROM GERMANY
DIFFUSER	:PRISMATIC TYPE CLEAR POLYCABONATE INFECTED UV STABLE, WITE STUDDED ANGLES FOR ITS TOTAL TRANSPARENCY AND ANTIDAZZLE
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKET TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKET TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP65 CLASS I
COLOR	:GREY
INSTALLATION	:SURFACE OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, CAR PARK, CLEANROOM, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP
COMPLETE SET**	:INCLUDING ELECTRONIC BALLAST,LAMP FOR T5 LAMP

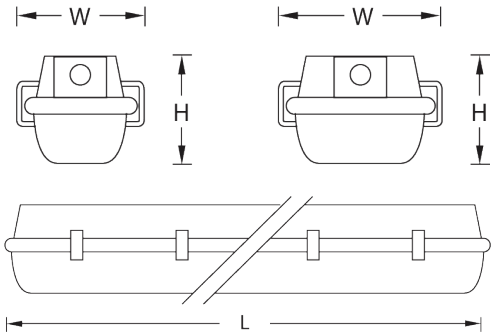

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF G8-120	1 x 18W. T8	665	100	110	2.80
LPF G8-220	2 x 18W. T8	665	130	100	4.20
LPF G8-140	1 x 36W. T8	1270	100	110	4.10
LPF G8-240	2 x 36W. T8	1270	130	100	6.20
LPF G8-340	3 x 36W. T8	1270	130	100	6.70
LPF G8-158	1 x 58W. T8	1580	100	110	6.20
LPF G8-258	2 x 58W. T8	1580	130	100	8.00
LPF G8-132	1 x 32W. T8	1270	100	110	4.10

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT