PROJECT : .....


SALE : .....

www.lightpluslighting.net

FLUORESCENT
ACRYLIC DIFFUSER TYPE

MODEL : LP-FLPR-220-240(W30)



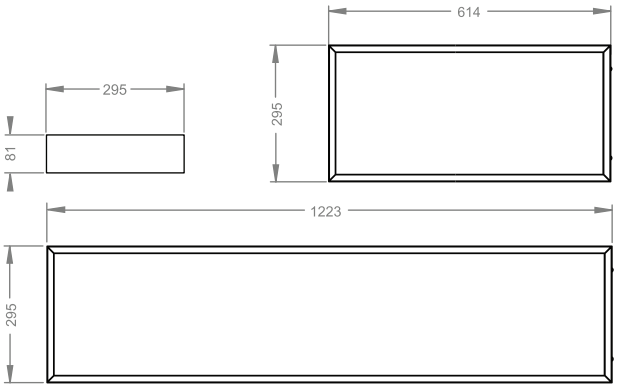

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR (OPTIONAL)	- PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% - PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95%
DIFFUSER	:OPAL ACRYLIC (OP), CLEAR ACRYLIC (CL), PRISMATIC ACRYLIC (PR)
FRAME	:WHITE ENAMEL STEEL FRAME (STANDARD) :EXTRUDE ALUMINIUM TRIM (OPTIONAL) :SILICONE GASKET (OPTIONAL) :WEATHER PROOF GASKET (OPTIONAL)
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKED TYPE TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS IP 40
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE HOTEL, UNIVERSITY, RESTAURANT, GOVERNMENTAL BUILDING, FACTORY, SHOP, WAREHOUSE, RESIDENTIAL, TOILET, CANTEEN, CLEAN ROOM, ETC.
USE LAMP	:LED T8 LAMP



☐ ☐ ☐

THICKNESS OPTION

☐ 0.4 mm ☐ 0.6 mm ☐ 0.8 mm ☐ 1.0 mm

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)	
		L	W	H	L	W
LP-FLPR-220(W30)	2xG13 LED T8	614	295	81	-	-
LP-FLPR-240(W30)	2xG13 LED T8	1223	295	81	-	-

NOTE.....
.....
.....
.....
.....