
LED CANOPY

IK08 IP66

1955-2551

Patented Fin Aluminum Heat Sink Structure
High Quality Aluminum Processing Technique
Special Surface Treatment Process
High Brightness LED Light Source
High Effciency and Long Life Power Supply




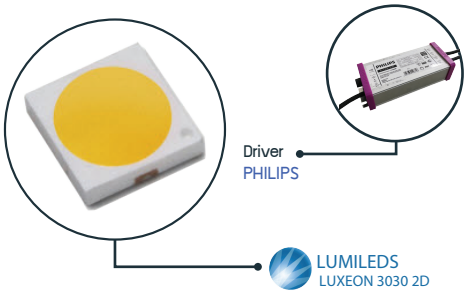




MODEL	LP-HBL041-050	LP-HBL041-100	LP-HBL041-150	LP-HBL041-200
Power Consumption	50W	100W	150W	200W
Operating Voltage	85-305 VAC,50/60 Hz			
%THDi	<10%			
Power Factor	>0.95			
Surge Protection	6 kV (L-N), 10 kV (L/N-G)			
Luminous Flux	7,500lm	15,000lm	22,500lm	30,000lm
Efficacy	150lm/W			
Color Temperature	5,700K			
CRI	>70			
Beam angle*	60°, 90°			
Operating Temperature	-40c to +50c			
Lifetime (@ L70)	>54,000 hrs			
Dimension (WxLxH)	434x380x88mm	434x380x88mm	434x380x88mm	434x470x88mm
Weight	4.5 kg	5 kg	6 kg	7 kg

Light Distribution



60°



90°

Drawing

