OBSTRUCTION LIGHT

RED FRESNEL GLASS GLOBES



LP-P0G

SPECIFICATION

COMPLIANCES

FAA AC 150/5345-43 : L-810 FCC RULES AND REGULATIONS

CANADIAN STANDARDS ASSOCIATION (CSA) ICAO ANNEX 14

SPECIFICATION :RED FRESNAL GLASS GLOBES FOR 360 ANGLE VISIBILITY

:OPERATING VOLTAGE ON 120 OR 220 VAC 50-60 HZ POWDER SUPPLY WHEN USED WITH PROPER VOLTAGE LAMP

:THREADED HUB (1 INCH) FOR MOUNTING

:PRE-WIRED LEADS


:CAST ALUMINIUM HOUSING WITH YELLOW FINISH

:GLOBES WITH TETHER & CLAMP BAND


:ACCEPTS TRAFFIC SIGNAL LAMPS WISH USA. MEDIUM SCREW BASE AND EUROPEAN E27 BASE

:O-RING GLOBE SEAL

APPLICATION :IN AIR TRAFFIC CONTROL TOWER, HIGH-RISE, CONSTRUCTIONS, AUTOMATIC GATES, INDUSTRIES, ETC.



MODEL	LAMP HOLDER	LIFE (HOURS)	LAMP TYPE	WEIGHT (kg.)
LP-P0G-1100	1 x E 27	8,000	1 x 100W.	2
LP-P0G-1L14	1 x LED	100,000	1 x 14W. LED	1.90
LP-P0G-2100	2 x E 27	8,000	2 x 100W.	4.50
LP-P0G-2L14	2 x LED	100,000	2 x 14W. LED	4.40

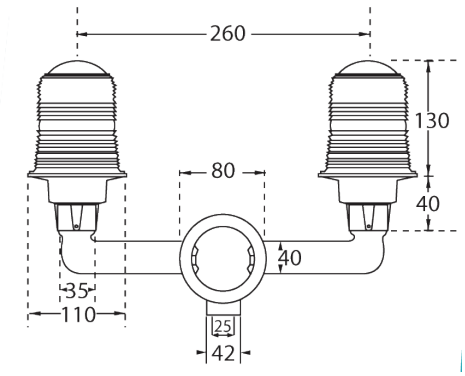

WIRES

☐ THW	☐ 70 °C	☐ 0.5 SQmm.	☐ 13 AWG
☐ UL STYLE & CSA TYPE	☐ 90 °C	☐ 1.0 SQmm.	☐ 15 AWG
☐ HEATER WIRE	☐ 105 °C	☐ 1.5 SQmm.	☐ 17 AWG
☐ OTHER	☐ 200 °C	☐ 2.5 SQmm.	☐ 20 AWG