
light PLUS

LED PANEL

IP20


1955-2551

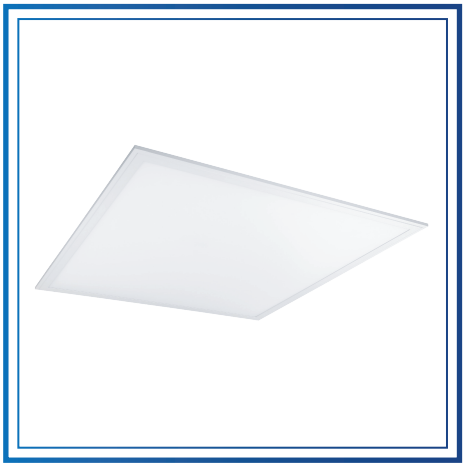


LP-PNL021-40

MODEL	LP-PNL021-40		
Power Consumption	40W		
Operating Voltage	220-240 VAC		
%THDi	≤20%		
Power Factor	≥0.9		
Luminous Flux	4,000 lm	4,000 lm	4,000 lm
Color Temperature	4,000K	5,000K	6,500K
CRI	≥80		
Beam angle	110˚		
Operating Temperature	-0˚c to +40˚c		
Lifetime	>50,000 hrs.		
Material	Aluminium		
Dimension (WxLxH)	595x595x10mm		

Drawing

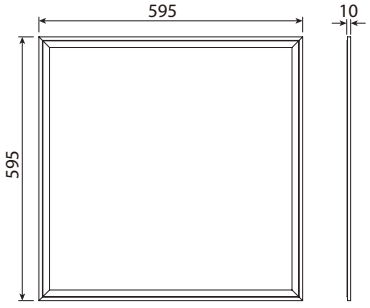

Light Distribution Curve



GUS ENTERPRISE CO.,LTD.
52/39 Samsen Nai, Phaya thai, Bangkok 10400 Tel. 061-5455-978 Fax. 02-731-2538