lightPLUS

FLUORESCENT

STANDARD INDUSTRIAL TYPE



LPF I1-XXX WP

SPECIFICATION

HOUSING : HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT : ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR : WHITE STOVED ENAMELLED POWDER COAT

WIRES : THW, TIS.11-1988 STANDARD

LAMP HOLDER W/P : WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORDING TO IEC 60400/VDE 0615 PART 3, UL

STARTER HOLDER : ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


PROTECTION CLASS : PROTECTION CLASS EQUIVALENT TO IP 44

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION : FACTORY, WAREHOUSE, CANTEEN, CARPARK, ETC.

COMPLETE SET* : INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

COMPLETE SET** : INCLUDING ELECTRONIC BALLAST FOR T5 LAMP

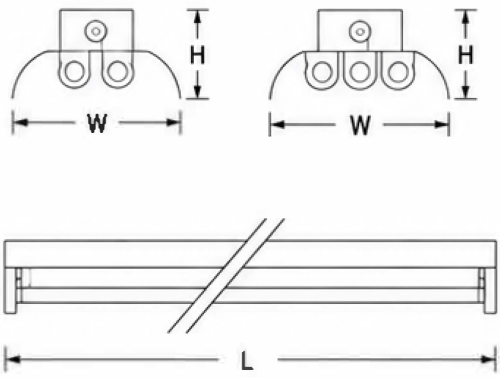

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
LPF I1-220 WP	2 x 18W. T8	635	240	105	3.30
LPF I1-232 WP	2 x 32W. T8	1245	240	105	4.80
LPF I1-240 WP	2 x 36W. T8	1245	240	105	4.80
LPF I1-320 WP	3 x 18W. T8	635	345	115	4.95
LPF I1-340 WP	3 x 36W. T8	1245	345	115	7.75

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT