FLUORESCENT

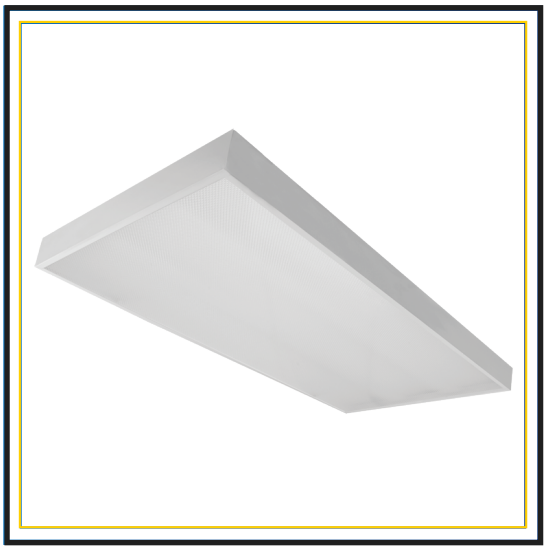
LP BAY T8 ACRYLIC DIFFUSER TYPE


CLEAR


STIPPLE


OPAL

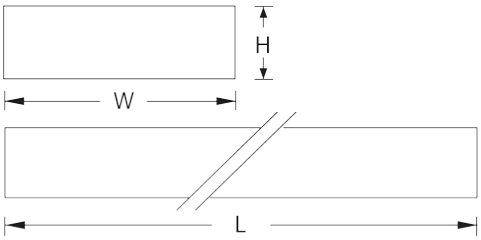

PRISMATIC



LPF LPR

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY
DIFFUSER	:OPAL ACRYLIC (OP), CLEARACRYLIC (CL), STIPPLE ACRYLIC (ST), PRISMATIC ACRYLIC (PR)
FRAME	:WHITE ENAMEL STEEL, EXTRUDE ALUMINIUM TRIM (OPTIONAL), SILICONE GASKET (OPTIONAL) WEATHER PROOF GASKET (OPTIONAL)
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 55
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE HOTEL, UNIVERSITY, RESTAURANT, GOVERNMENTAL BUILDING, FACTORY, SHOP, WAREHOUSE, RESIDENTIAL, TOILET, CANTEEN, CLEAN ROOM, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP
COMPLETE SET**	:INCLUDING ELECTRONIC BALLAST, LAMP FOR T8 LAMP



MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF LPR-220B	2 x 18W. T8	630	600	95	6.40
LPF LPR-240B	2 x 36W. T8	1225	600	95	9.50
LPF LPR-320	3 x 18W. T8	630	600	95	6.70
LPF LPR-340	3 x 36W. T8	1225	600	95	9.80
LPF LPR-420	4 x 18W. T8	630	600	95	7.20
LPF LPR-440	4 x 36W. T8	1225	600	95	10.10

INSTALLATION : SURFACE OR SUSPEND MOUNT