FLUORESCENT

RECESS CLEAN ROOM TYPE


CLEAR


STIPPLE


OPAL


PRISMATIC




LPF MCR

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY
	HIGH QUALITY MACHINES
	:WEATHERPROOF RUBBER GASKET
	:SILICONE GASKET
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH
	UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
	99.85% MIRROR FINISH, TOTAL REFLECTION 87%
	(DIN 5063-3) FORM GERMANY
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
	99.99% MIRROR FINISH, TOTAL REFLECTION 95%
	(DIN 5063-3) FORM GERMANY

DIFFUSER	:OPAL ACRYLIC (OP), CLEARACRYLIC (CL), STIPPLE
	ACRYLIC (ST), PRISMATIC ACRYLIC (PR)
FRAME	:WHITE ENAMEL STEEL
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE,
	TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 55
INSTALLATION	:RECESS T-BAR CEILING, RECESS CONCEAL CEILING
APPLICATION	:HOSPITAL, FACTORY, WAREHOUSE, CLEAN ROOM, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

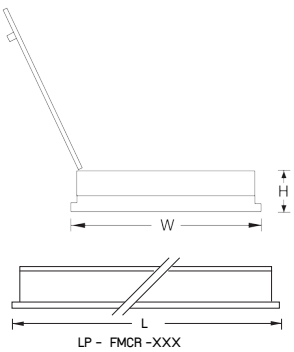

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)		WEIGHT
		L	W	H	L	W	(kg.)
LPF MCR-240A	2 x 36W. T8	1255	295	120	1230	280	7.50
LPF MCR-240B	2 x 36W. T8	1255	595	120	1230	580	10.30
LPF MCR-340	3 x 36W. T8	1255	595	120	1230	580	11.30
LPF MCR-440	4 x 36W. T8	1255	595	120	1230	580	11.30