FLUORESCENT


OPEN FRONTED TYPE



LPF B1

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 20
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, SHOP, RESIDENTIAL, CAR PARK, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP
COMPLETE SET**	:INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP

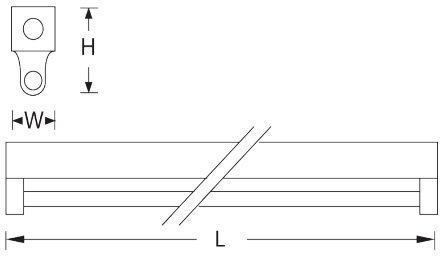

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF B1-120D	1 x 18W. T8	635	62	85	1.60
LPF B1-140D	1 x 36W. T8	1245	62	85	2.20
LPF B1-132D	1 x 32W.T8	1245	62	85	2.20

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT