FLUORESCENT


OPEN FRONTED TYPE



LPF B2

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:(LP-F B2-XXXA) WHITE STOVED ENAMELLED POWDER COAT :(LP-F B2-XXXB) ALUMINIUM REFLECTOR 99.85% MIRROR
	:THW, TIS.11-1988 STANDARD
WIRES	:SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
LAMP HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 TANDARD
STARTER HOLDER	TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 20
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, SHOP, RESIDENTIAL, CAR PARK, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

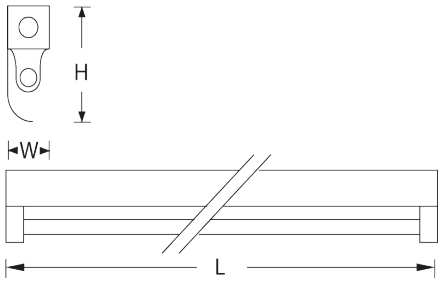

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF B2-120A	1 x 18W. T8	635	62	155	2.10
LPF B2-140A	1 x 36W. T8	1245	62	155	2.90
LPF B2-120B	1 x 18W. T8	635	62	155	2.00
LPF B2-140B	1 x 36W. T8	1245	62	155	2.70

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT