light PLUS

FLUORESCENT


OPEN FRONTED TYPE



LPF B2

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:(LP-F B2-XXX A WP) WHITE STOVED ENAMELLED POWDER COAT :(LP-F B2-XXX B WP) ALUMINIUM REFLECTOR 99.85% MIRROR
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER W/P	:WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORDING TO IEC 60400/VDE 0615 PART3. UL (INSECT PROOF LAMP)
STARTER HOLDER	:ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 44
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, CANTEEN, CAR PARK ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

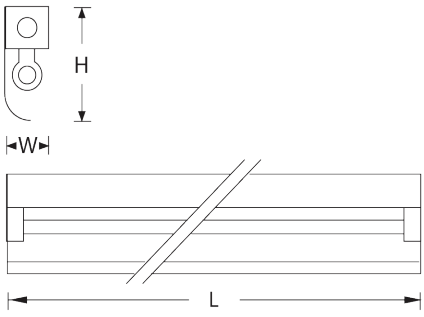

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF B2-120A WP	1 x 18W. T8	635	62	155	2.00
LPF B2-140A WP	1 x 36W. T8	1245	62	155	2.80
LPF B2-132A WP	1 x 32W. T8	1245	62	155	2.80
LPF B2-120B WP	1 x 18W. T8	635	62	155	1.90
LPF B2-140B WP	1 x 36W. T8	1245	62	155	2.60

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT