
light PLUS

FLUORESCENT


STANDARD INDUSTRIAL TYPE

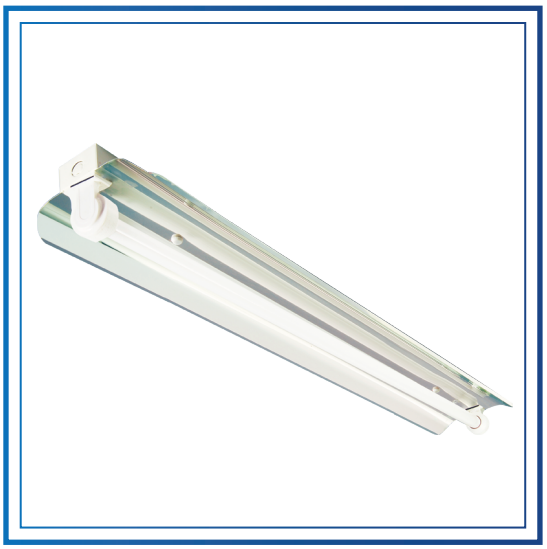

LPF I2-120-140WP

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5036-3) FROM GERMANY
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5036-3) FROM GERMANY
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER W/P	:WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORING TO IEC 60400/VDE 0615 PART 3, UL
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 44
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, CANTEEN, CARPARK, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

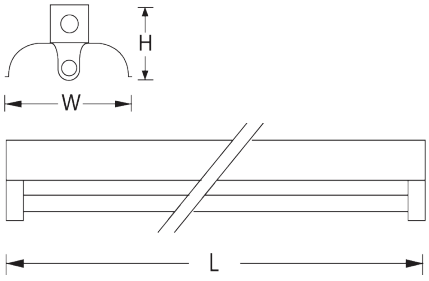

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF I2-120 WP	1 x 18W. T8	635	182	100	1.85
LPF I2-140 WP	1 x 36W. T8	1245	182	100	2.70
LPF I2-132 WP	1 x 32W. T8	1245	182	100	2.70

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT