light PLUS

# FLUORESCENT


## STANDARD INDUSTRIAL TYPE



## LPF I2-XXX WP

## SPECIFICATION

| | |
|---|---|
| HOUSING | :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES |
| SURFACE TREATMENT | :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT |
| REFLECTOR | :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5036-3) FROM GERMANY |
| (OPTIONAL) | :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5036-3) FROM GERMANY |
| WIRES | :THW, TIS.11-1988 STANDARD |
| LAMP HOLDER | :WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORING TO IEC 60400/VDE 0615 PART 3, UL |
| STARTER HOLDER | :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE TIS344-1987 STANDARD |
| PROTECTION CLASS | :PROTECTION CLASS EQUIVALENT TO IP 44 |
| INSTALLATION | :SURFACE MOUNT OR SUSPEND MOUNT |
| APPLICATION | :FACTORY, WAREHOUSE, CANTEEN, CARPARK, ETC. |
| COMPLETE SET* | :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP |

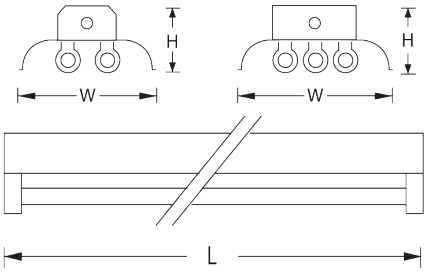


| MODEL | LAMP | DIMENSION(mm.) | | | WEIGHT |
|---|---|---|---|---|---|
| | | L | W | H | (kg.) |
| LPF I2-220 WP | 2 x 18W. T8 | 635 | 240 | 105 | 3.30 |
| LPF I2-240 WP | 2 x 36W. T8 | 1245 | 240 | 105 | 4.80 |
| LPF I2-320 WP | 3 x 18W. T8 | 635 | 345 | 115 | 4.95 |
| LPF I2-340 WP | 3 x 36W. T8 | 1245 | 345 | 115 | 7.75 |
| LPF I2-232 WP | 2 x 36W.T8 | 1245 | 340 | 115 | 7.20 |

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT