
FLUORESCENT


SPECULAR REFLECTOR INDUSTRIAL TYPE

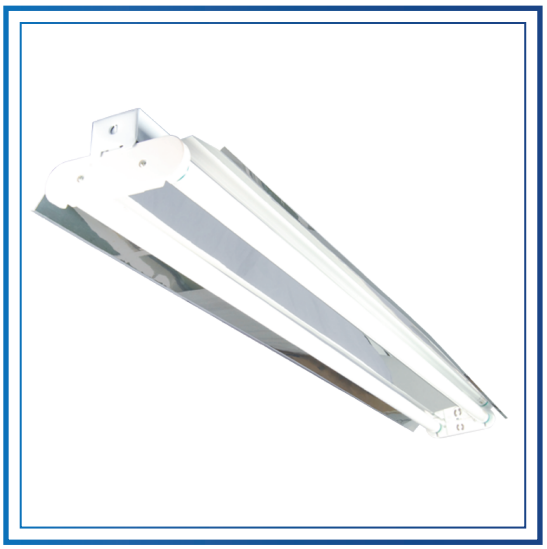

LPF I4-220-240

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTOR 87% (DIN 5036-3) FROM GERMANY
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTOR 95% (DIN 5036-3) FROM GERMANY
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 20
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:FACTORY, WAREHOUSE, SHOP, CANTEEN DEPARTMENT STORE, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

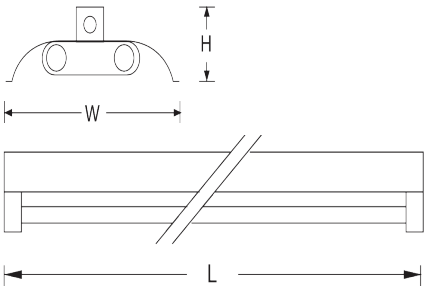

MODEL	LAMP	DIMENSION(mm.)			WEIGHT
		L	W	H	(kg.)
LPF I4-220	2 x 18W. T8	610	200	85	2.30
LPF I4-240	2 x 36W. T8	1220	200	85	3.45

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT

SHEET STEEL THICKNESS

☐ 0.6 mm. ☐ 0.7 mm. ☐ 0.8 mm.

LAMP HOLDER

☐ ROTOR LOCKED TYPE

☐ SPRING LOCKED TYPE

REFLECTOR

☐ TOTAL REFLECTION 87 %

☐ TOTAL REFLECTION 95 %

WIRES

☐ THW	☐ 70°C	☐ 0.5 SQmm.	☐ 13 AWG
☐ UL STYLE & CSA TYPE	☐ 90°C	☐ 1.0 SQmm.	☐ 15 AWG
☐ HEATER WIRE	☐ 105°C	☐ 1.5 SQmm.	☐ 17 AWG
☐ OTHER	☐ 200°C	☐ 2.5 SQmm.	☐ 20 AWG