light PLUS

FLUORESCENT


RECESS OPEN TYPE



LPF MBS

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 20
INSTALLATION	:RECESS T-BAR CEILING, RECESS CONCEAL CEILING
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, FACTORY SHOP, WAREHOUSE, CANTEEN, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

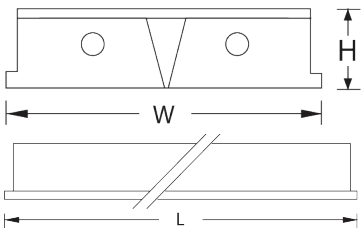

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)		WEIGHT
		L	W	H	L	W	(kg.)
LPFMBS-120A	1 x 18W. T8	665	200	100	640	180	3.70
LPFMBS-120B	1 x 18W. T8	665	295	100	640	280	4.50
LPFMBS-220A	2 x 18W. T8	665	295	100	640	280	4.60
LPFMBS-220B	2 x 18W. T8	665	595	100	640	580	7.60
LPFMBS-140A	1 x 36W. T8	1275	200	100	1250	180	6.60
LPFMBS-140B	1 x 36W. T8	1275	295	100	1250	280	7.20
LPFMBS-132B	1 x 32W. T8	1275	295	100	1250	280	7.20
LPFMBS-240A	2 x 36W. T8	1275	295	100	1250	280	7.30
LPFMBS-232A	2 x 32W. T8	1275	295	100	1250	280	7.30
LPFMBS-240B	2 x 36W. T8	1275	595	100	1250	580	11.50
LPFMBS-232B	2 x 32W. T8	1275	595	100	1250	580	11.50

INSTALLATION : RECESS T-BAR CEILING