light PLUS

FLUORESCENT

RECESS OPEN TYPE




LPFTMB

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY

WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 20
INSTALLATION	:RECESS T-BAR CEILING, RECESS CONCEAL CEILING
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, FACTORY SHOP, WAREHOUSE, CANTEEN, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

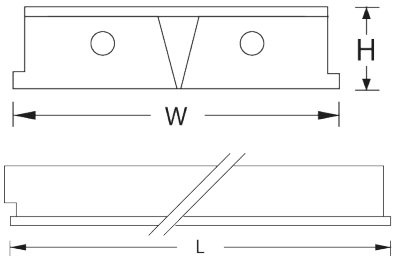

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)		WEIGHT
		L	W	H	L	W	(kg.)
LPFTMB-120A	1 x 18W. T8	595	200	100	580	180	3.60
LPFMBS-120B	1 x 18W. T8	595	295	100	580	280	4.40
LPFMBS-220A	2 x 18W. T8	595	295	100	580	280	4.50
LPFMBS-220B	2 x 18W. T8	595	595	100	580	580	7.50
LPFMBS-140A	1 x 36W. T8	1195	200	100	1180	180	6.50
LPFMBS-140B	1 x 36W. T8	1195	295	100	1180	280	7.10
LPFMBS-240A	2 x 36W. T8	1195	295	100	1180	280	7.20
LPFMBS-240B	2 x 36W. T8	1195	595	100	1180	580	11.50

INSTALLATION : RECESS T-BAR CEILING, RECSS CONCEAL CEILING (M-BAR)