light PLUS

FLUORESCENT

ACRYLIC DIFFUSER TYPE

CLEAR

OPAL


PRISMATIC



LPFLPR

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
DIFFUSER	:OPAL ACRYLIC (OP), CLEARACRYLIC (CL), PRISMATIC ACRYLIC (PR)
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 55
INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE HOTEL, UNIVERSITY, RESTLPRANT, GOVERNMENTAL BUILDING, FACTORY, SHOP, WAREHOUSE, RESIDENTIAL, TOILET, CANTEEN, CLEAN ROOM, ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP OR LED LINEAR
COMPLETE SET**	:INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP OR LED LINEAR

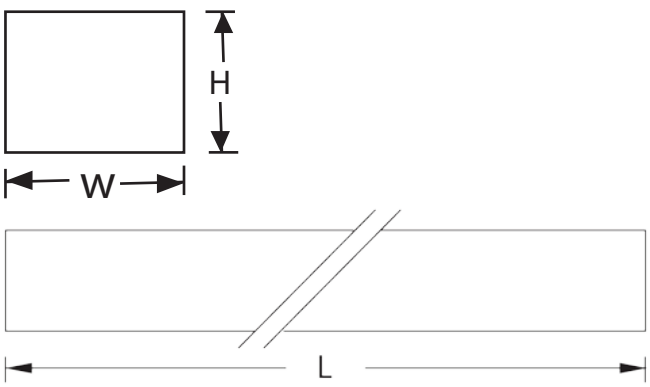

MODEL	LAMP	DIMENSION(mm.)		
		L	W	H
LPFLPR-120A-8-S	1 x 18W T8	630	80	80
LPFLPR-120A-10-S	1 x 18W T8	630	100	80
LPFLPR-220A-10-S	2 x 18W T8	630	100	80
LPFLPR-140A-8-S	1 x 36W T8	1225	80	80
LPFLPR-140A-10-S	1 x 36W T8	1225	100	80
LPFLPR-240A-10-S	2 x 36W T8	1225	100	80