




AUF B1-120-140 WP

SPECIFICATION

<p>HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES</p> <p>SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT</p> <p>WIRES :THW, TIS.11-1988 STANDARD</p> <p>LAMP HOLDER :WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORDING TO IEC 60400/VDE 0615 PART3. UL (INSECT PROOF LAMP)</p>	<p>STARTER HOLDER :ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD</p> <p>PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 44</p> <p>INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT</p> <p>APPLICATION :FACTORY, WAREHOUSE, CANTEEN, CAR PARK ETC.</p> <p>COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP</p>
---	---

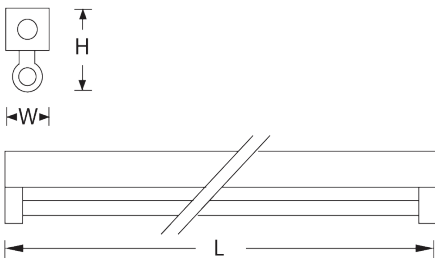

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF B1-120 WP	1 x 18W. T8	635	62	85	1.50
AUF B1-140 WP	1 x 36W. T8	1245	62	85	2.10