



AUF B2

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :{(AU-F B2-XXXXA) WHITE STOVED ENAMELLED POWDER COAT
:(AU-F B2-XXXXB) ALUMINIUM REFLECTOR 99.85% MIRROR
:THW, TIS.11-1988 STANDARD

WIRES :SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

LAMP HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 TANDARD


STARTER HOLDER TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :FACTORY, WAREHOUSE, SHOP, RESIDENTIAL, CAR PARK, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

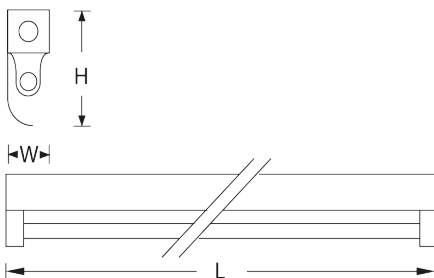

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF B2-120A	1 x 18W. T8	635	62	155	2.10
AUF B2-140A	1 x 36W. T8	1245	62	155	2.90
AUF B2-120B	1 x 18W. T8	635	62	155	2.00
AUF B2-140B	1 x 36W. T8	1245	62	155	2.70

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT