



AUF B2

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :{AU-F B2-XXX A WP} WHITE STOVED ENAMELLED POWDER COAT
:{AU-F B2-XXX B WP} ALUMINIUM REFLECTOR 99.85%
MIRROR

WIRES :T8W, TIS.11-1988 STANDARD

LAMP HOLDER W/P :WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORDING TO IEC 60400/VDE 0615 PART3. UL (INSECT PROOF LAMP)


STARTER HOLDER :ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 44

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :FACTORY, WAREHOUSE, CANTEEN, CAR PARK ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

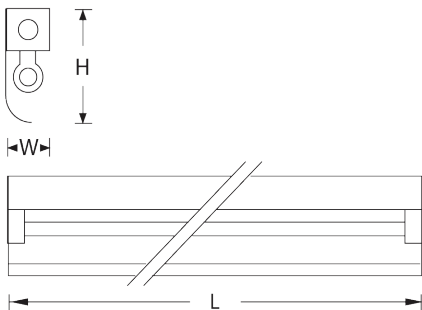

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF B2-120A WP	1 x 18W. T8	635	62	155	2.00
AUF B2-140A WP	1 x 36W. T8	1245	62	155	2.80
AUF B2-132A WP	1 x 32W. T8	1245	62	155	2.80
AUF B2-120B WP	1 x 18W. T8	635	62	155	1.90
AUF B2-140B WP	1 x 36W. T8	1245	62	155	2.60

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT