



**AUF FI2**

**SPECIFICATION**

**HOUSING** :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

**SURFACE TREATMENT** :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

**REFLECTOR** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5036-3) FROM GERMANY

**(OPTIONAL)** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5036-3) FROM GERMANY

**COVER** :WHITE STOVED ENAMELLED WIRE GUARD

**WIRES** :THW, TIS.11-1988 STANDARD

**LAMP HOLDER** :SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

**LAMP HOLDER W/P** :WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, IEC 60400/VDE 0615 PART3, UL


**STARTER HOLDER** :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

**PROTECTION CLASS** :PROTECTION CLASS EQUIVALENT TO IP 20 (AU-FIX-XXXG), IP 44 (AU-FIX-XXXGWP)

**INSTALLATION** :SURFACE MOUNT OR SUSPEND MOUNT

**APPLICATION** :FACTORY, WAREHOUSE, CARPARK, ETC.

**COMPLETE SET\*** :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

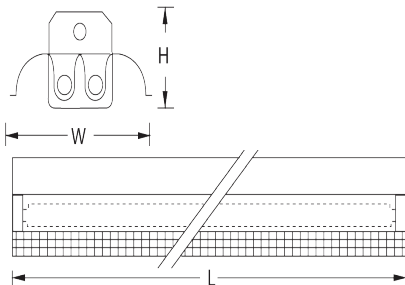

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF FI2-240G	2 x 36W. T8	1245	240	125	4.85
AUF FI2-240GWP	2 x 36W. T8	1245	240	125	4.70
AUF FI2-232GWP	2 x 36W. T8	1245	240	125	4.70

**INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT**