



AUF LBR

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE, UNIVERSITY, GOVERNMENTAL BUILDING, FACTORY SHOP, WAREHOUSE, CANTEEN, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

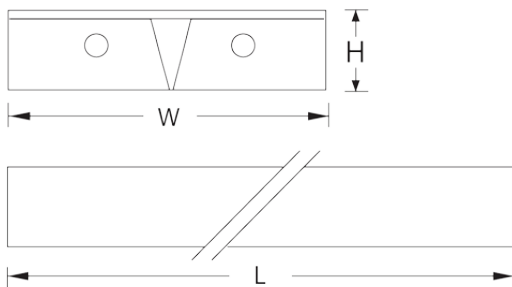

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUFLBR-120A	1 x 18W. T8	630	200	95	3.50
AUFLBR-120B	1 x 18W. T8	630	300	95	4.30
AUFLBR-220A	2 x 18W. T8	630	300	95	4.60
AUFLBR-220B	2 x 18W. T8	630	600	95	7.60
AUFLBR-140A	1 x 36W. T8	1225	200	95	6.40
AUFLBR-140B	1 x 36W. T8	1225	300	95	6.90
AUFLBR-240A	2 x 36W. T8	1225	300	95	7.30
AUFLBR-240B	2 x 36W. T8	1225	600	95	11.60
AUFLBR-228A	2 x 36W. T5	1170	300	70	6.25

INSTALLATION : SURFACE OR SUSPEND MOUNT