



AUFTM2-340-440

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87%

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95%

LOUVER :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH FOR LONGITUDINAL & PROFILE ALUMINIUM CROSS BLADE

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :RECESS T-BAR CEILING, RECESS CONCEAL CEILING (M-BAR)

APPLICATION :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

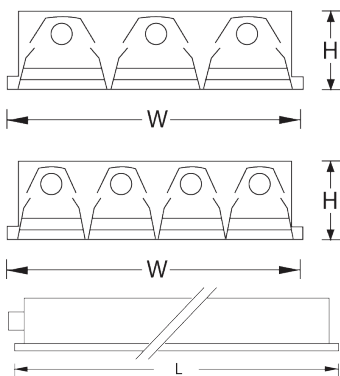

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)		WEIGHT (kg.)
		L	W	H	L	W	
AUFTM2-340	3 x 36W. T8	1195	595	80	1180	580	10.05
AUFTM2-440	4 x 36W. T8	1195	595	80	1180	580	10.45

INSTALLATION : RECESS T-BAR CEILING, RECESS CONCEAL CEILING (M-BAR)

SHEET STEEL THICKNESS

- 0.6 mm. 0.7 mm. 0.8 mm.

LAMP HOLDER

- ROTOR LOCKED TYPE
- SPRING LOCKED TYPE

REFLECTOR

- TOTAL REFLECTION 87 %
- TOTAL REFLECTION 95 %

WIRES

<input type="checkbox"/> THW	<input type="checkbox"/> 70 °C	<input type="checkbox"/> 0.5 SQmm.	<input type="checkbox"/> 13 AWG
<input type="checkbox"/> UL STYLE & CSA TYPE	<input type="checkbox"/> 90 °C	<input type="checkbox"/> 1.0 SQmm.	<input type="checkbox"/> 15 AWG
<input type="checkbox"/> HEATER WIRE	<input type="checkbox"/> 105 °C	<input type="checkbox"/> 1.5 SQmm.	<input type="checkbox"/> 17 AWG
<input type="checkbox"/> OTHER	<input type="checkbox"/> 200 °C	<input type="checkbox"/> 2.5 SQmm.	<input type="checkbox"/> 20 AWG