



**AUF V1-120-140 WP**

**SPECIFICATION**

**HOUSING** :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

**SURFACE TREATMENT** :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

**WIRES** :THW, TIS.11-1988 STANDARD

**LAMP HOLDER W/P** :WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORDING TO IEC 60400/VDE 0615 PART3. UL (INSECT PROOF LAMP)

**STARTER HOLDER** :ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


**PROTECTION CLASS** :PROTECTION CLASS EQUIVALENT TO IP 44

**INSTALLATION** :SURFACE MOUNT OR SUSPEND MOUNT

**APPLICATION** :FACTORY, WAREHOUSE, CANTEEN, CLEAN ROOM ETC.

**COMPLETE SET\*** :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

**COMPLETE SET\*\*** :INCLUDING ELECTRONIC BALLAST,LAMP FOR T5 LAMP

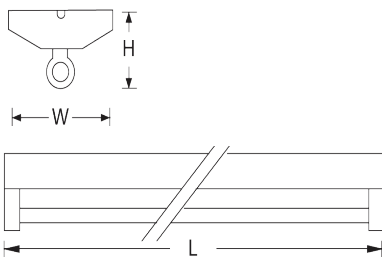

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF V1-120 WP	1 x 18W. T8	635	152	105	1.85
AUF V1-128 WP	1 x 28W. T8	1245	152	105	2.55
AUF V1-140 WP	1 x 36W. T8	1245	152	105	2.55

**INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT**