




**AUOT120**

**SPECIFICATION**

HOUSING :CORROSION RESISTANT CAST ALUMINIUM  
 HOUSING WITH STEEL POLE  
 :STAINLESS STEEL SCREWS  
 SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV  
 RESISTANT POLYESTER POWDER COAT  
 DIFFUSER :VANDAL RESISTANT OPAL GLASS

COLOR :BLACK, WHITE, SILVER, GREEN, OTHER COLORS  
 ARE AVAILABLE UPON CONSULTATION  
 PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 55  
 INSTALLATION :SURFACE FLOOR MOUNT  
 APPLICATION :CAR PARK, WALK WAYS, PARKS, ROAD WAYS  
 ETC.

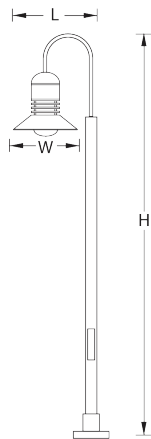

MODEL	DIMENSION(mm.)			LAMP HOLDER	LUMEN (MAX)	LAMP TYPE
	L	W	H			
AUOT120	545	415	2500	E 27	1550 lm.	PL 23W.
					3700 lm.	MV 80W.
					5600 lm.	HPS 70W.
					5300 lm.	MH 70W.

REMARK : WITH 3 SIZES AVAILABLE UPON REQUEST (330 mm. , 415 mm. , 500 mm.)

**WIRES**

<input type="checkbox"/> THW	<input type="checkbox"/> 70 °C	<input type="checkbox"/> 0.5 SQmm.	<input type="checkbox"/> 13 AWG
<input type="checkbox"/> UL STYLE & CSA TYPE	<input type="checkbox"/> 90 °C	<input type="checkbox"/> 1.0 SQmm.	<input type="checkbox"/> 15 AWG
<input type="checkbox"/> HEATER WIRE	<input type="checkbox"/> 105 °C	<input type="checkbox"/> 1.5 SQmm.	<input type="checkbox"/> 17 AWG
<input type="checkbox"/> OTHER	<input type="checkbox"/> 200 °C	<input type="checkbox"/> 2.5 SQmm.	<input type="checkbox"/> 20 AWG