


AUOW005

SPECIFICATION

HOUSING :CORROSION RESISTANT DIE CAST ALUMINIUM
 :STAINLESS STEEL SCREWS
 SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV
 RESISTANT POLYESTER POWDER COAT
 DIFFUSER :VANDAL RESISTANT TEMPERED GLASS
 FRAME :DIE CAST ALUMINIUM
 :SILICONE RUBBER

COLOR :BLACK, WHITE, SILVER
 PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 55
 INSTALLATION :WALL MOUNT
 APPLICATION :BUILDING, HOTEL, RESTAURANT, RESIDENTIAL
 PARKS, WALK WAYS, ETC.

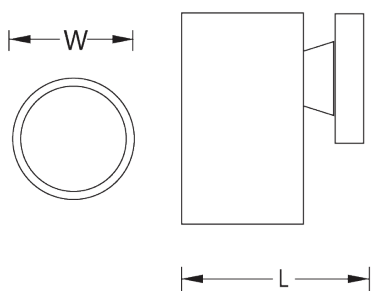

MODEL	DIMENSION(mm.)			LAMP HOLDER	LUMEN (MAX)	LAMP TYPE
	L	W	H			
AUOW005	120	65	168	GU 5.3	1200 cd.	MR 16 12V. 50W.
				GU 5.3	1200 cd.	MR 16 220V. 50W.
AUOW005/1	160	92	180	GU 5.3	1200 cd.	MR 16 12V. 50W.
				GU 5.3	1200 cd.	MR 16 220V. 50W.
AUOW005/2	180	110	190	E 27	1000 cd.	PAR 20 50W.
				E 27	800 lm.	PL 8, 11, 14W.
AUOW005/3	212	145	200	E 27	6900 cd.	PAR 30, 75, 100W.
				E 27	1500 lm.	PL 18, 23W.
				E 27	9300 cd.	PAR 38, 120W.