



AUOW006

SPECIFICATION

HOUSING :CORROSION RESISTANT DIE CAST ALUMINIUM
:STAINLESS STEEL SCREWS

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV
RESISTANT POLYESTER POWDER COAT

DIFFUSER :VANDAL RESISTANT TEMPERED GLASS


FRAME :DIE CAST ALUMINIUM
:SILICONE RUBBER

COLOR :BLACK, WHITE, SILVER

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 55

INSTALLATION :WALL MOUNT

APPLICATION :BUILDING, HOTEL, RESTAURANT, RESIDENTIAL
PARKS, WALK WAYS, ETC.

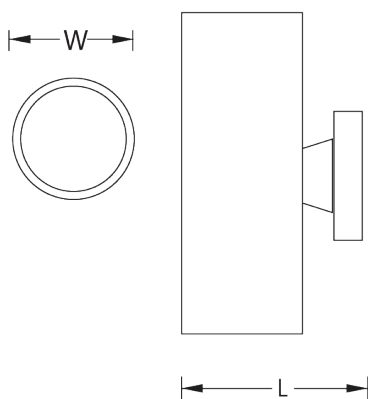

MODEL	DIMENSION(mm.)			LAMP HOLDER	LUMEN (MAX)	LAMP TYPE
	L	W	H			
AUOW006	120	65	245	GU 5.3 x 2	1200 cd.	2 x MR 16 12V. 50W.
				GU 5.3 x 2	1200 cd.	2 xMR 16 220V. 50W.
AUOW006/1	160	92	270	GU 5.3 x 2	1200 cd.	2 xMR 16 12V. 50W.
				GU 5.3 x 2	1200 cd.	2 xMR 16 220V. 50W.
AUOW006/2	180	110	300	E 27 x 2	600 lm.	2 x PL 5, 8, 11W.
				E 27 x 2	1000 cd.	2 x PAR 20 50W.
AUOW006/3	212	145	400	E 27 x 2	800 lm.	2 x PL 8, 11, 14W.
				E 27 x 2	6900 cd.	2 x PAR 30, 75, 100W.
AUOW006/4	267	200	410	E 27 x 2	1500 lm.	2 x PL 18, 23W.
				E 27 x 2	9300 cd.	2 x PAR 38, 120W.
AUOW006/4	267	200	410	RX 7s	6200 lm	2 x MHN-TD 70W.