



LED linear Lighting Solution Expert

GUS Enterprise Co., Ltd.

52/39 Sutthisan Winitchai Rd. Samsen Nai Sub-district ha
yathai District, Bangkok 10400

Tel: +66(61)5455-978 E-mail: sales9.gus@gmail.com







Unchalee Path

Mobile: 061-5455-978

Email : sales9.gus@gmail.com


Office show room

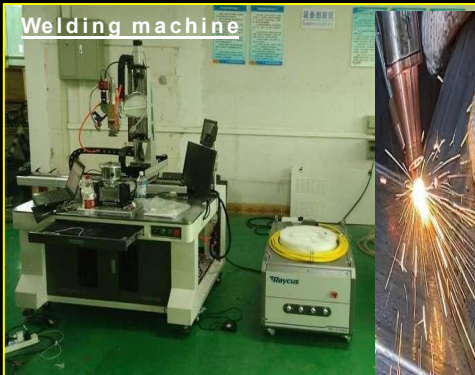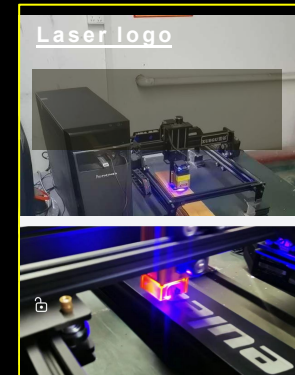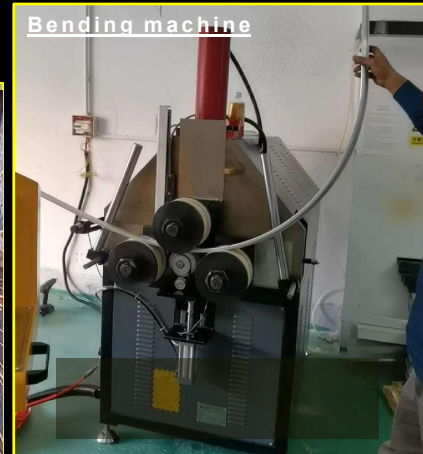

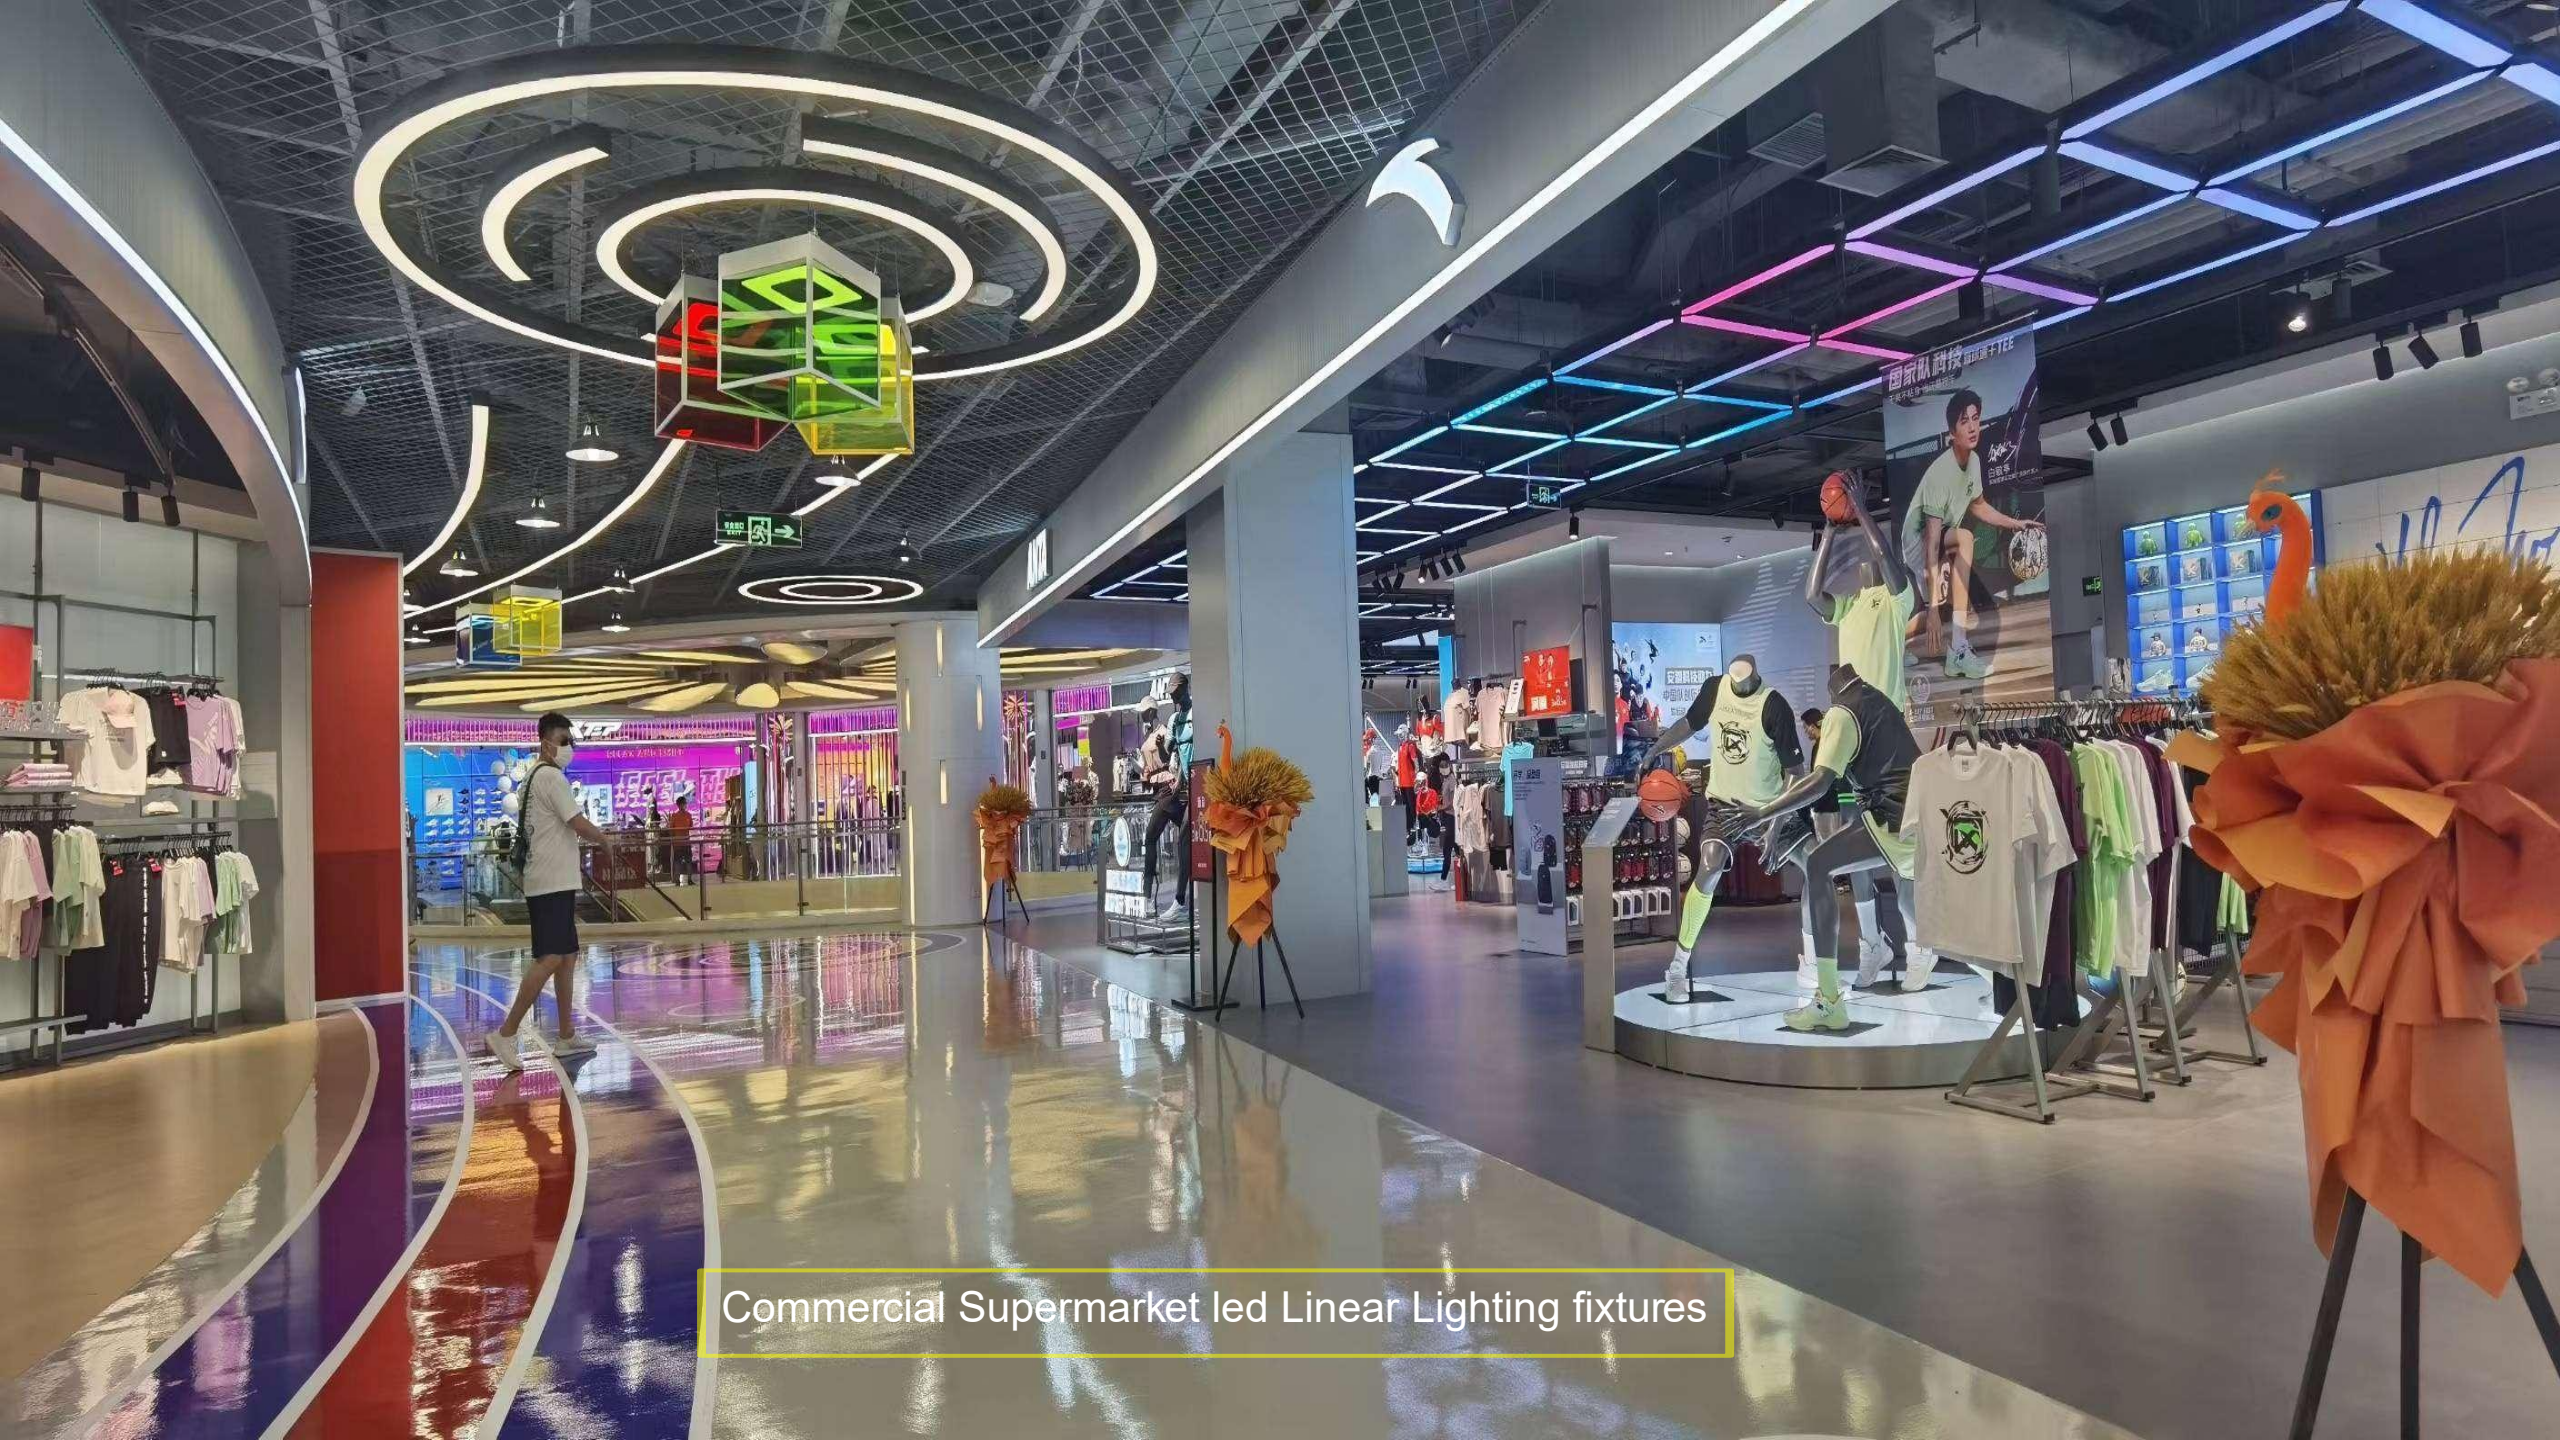

Commercial Supermarket led Linear Lighting fixtures

Curved led lights profile series, Customized Diamters/Sizes/Radius/Length




Ring




Oval




Square

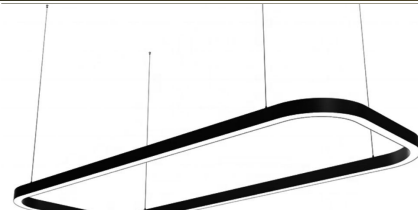


Rectangle



Triangle

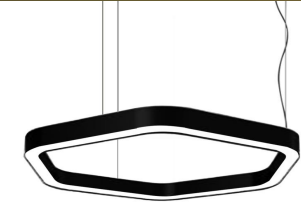


Hexagon




Curved

Customized Diameter

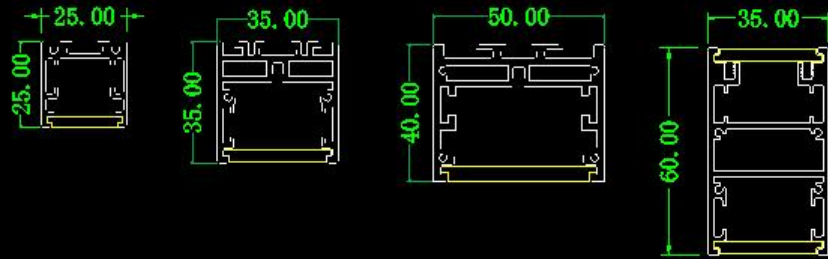

**Aluminum profile
+Silicone cover**

Customized Width 35~100mm & Diameter

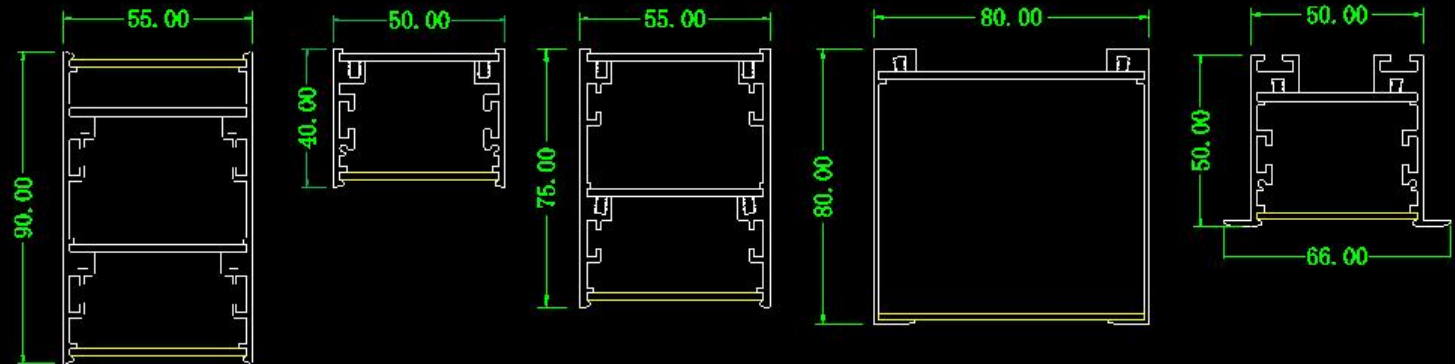

**Aluminum profile
+PC cover**



Round, Curved,
Arc angle type




● Led Ring / Oval-Arc pendant Light --- (pendant,surface mounted)

Features:

- Material:aluminum +PC diffuser / Silicone cover
- Customized Length and diameter 300-3000mm
- Profile color:silver,white,black,golden available
- Installation:pendant,recessed,wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate,so on.

Accessories:

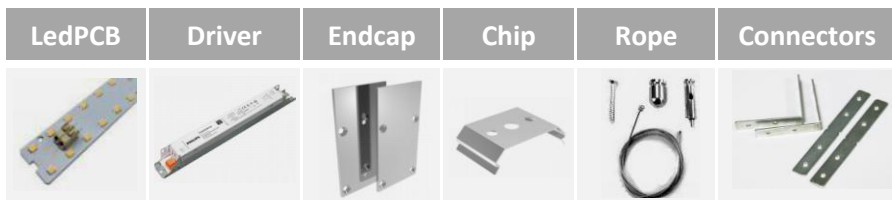


Specifications:

Item	GUS2525/GUS3535/GUS5040
Length	φ400/600/800/1000/1200/1500mm,customized
Led chip	SMD2835 / SMD5050
wattage	12/20/30/40/50/60W per meter
Beam angle	Silicone cover or PC cover , 100 degree
CRI &Lumen flux	CRI≥80/90 & Lumen flux >80lm/W
Input	Light Strip DC24V,D36V; AC input 100-240V
Color Temperature	3000K,4000K, 6000K,RGB/RGBW
Life Span	30,000-35,000Hs



Item:

GUS2525/GUS3535/GUS5040

with silicone cover, Diameter customized

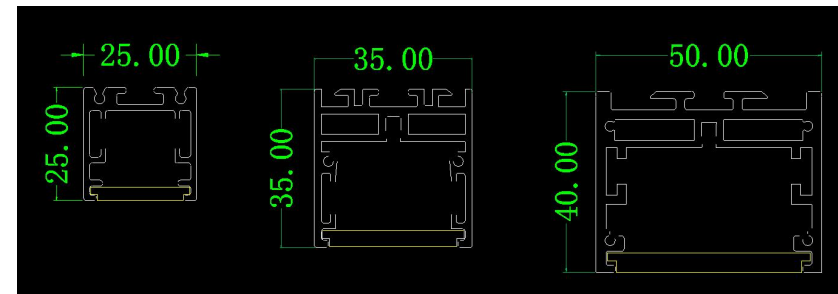

Installation Method:

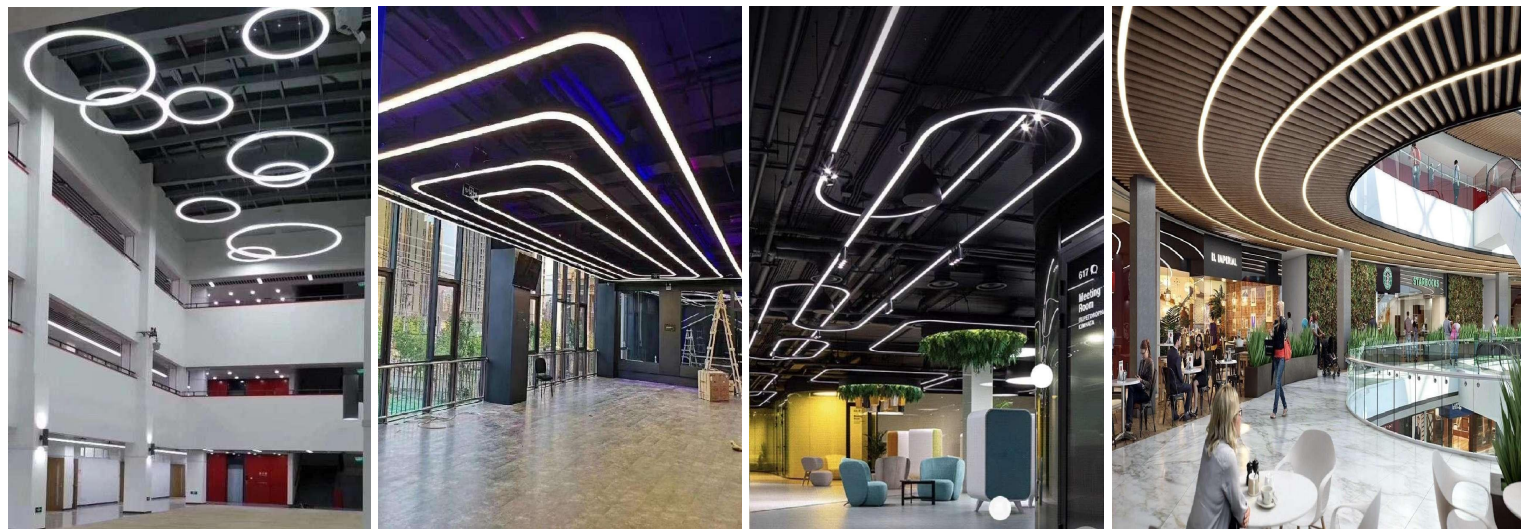




**Architecture building
led Linear Lighting fixtures**

● Led Ring / Curved Linear Light --- (Pendant mounted)

Features:

- Material:aluminum +PC diffuser
- Customized Length and diameter 300-3000mm
- Profile color:silver,white,black,golden available
- Installation:pendant,recessed,wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate,so on.

Accessories:

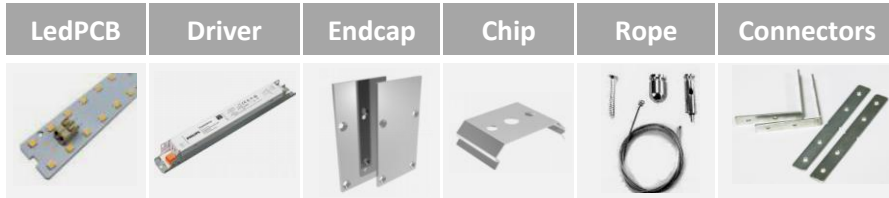

Specifications:

Item	GUSH40/GUSH75/GUSH80
Diameters	φ400/600/800/1000/1200/1500mm,customized
Led chip	SMD2835 / SMD5050
wattage	12/20/30/40/50/60W per meter
Beam angle	Silicone cover or PC cover , 100 degree
CRI &Lumen flux	CRI≥80*90 & Lumen flux >80lm/W
Input	Light Strip DC24V,D36V; AC input 100-240V
Color Temperature	3000K,4000K, 6000K,RGB/RGBW
Life Span	30,000-35,000Hs


Item:

GUSH40 / GUSH75





Width 35~100mm can be customized
Diameter can be customized

GUSH80

Width 50~200mm can be customized
Diameter can be customize

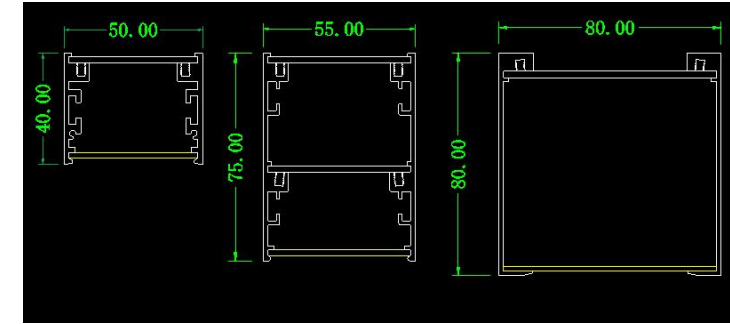

Installation Method:

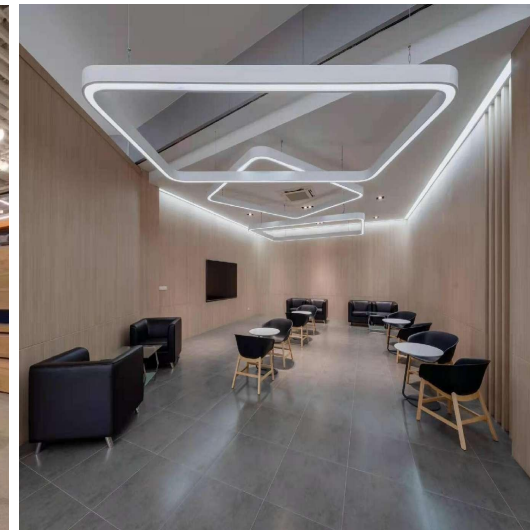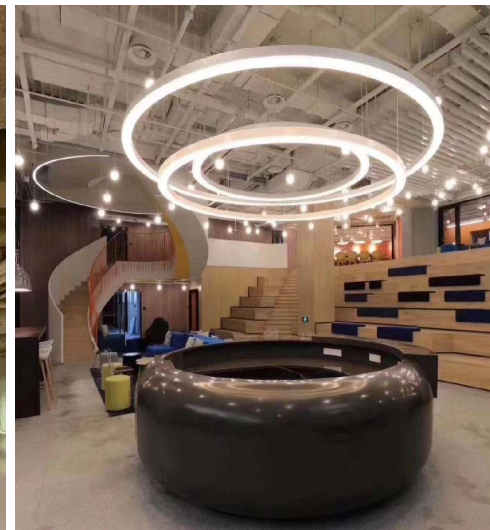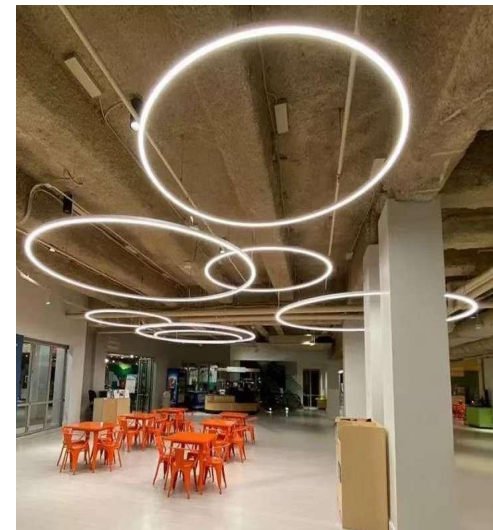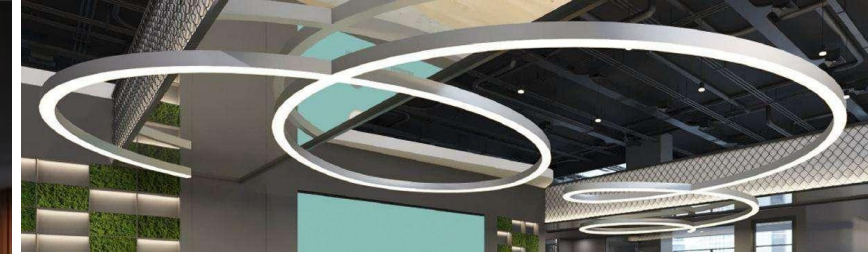



Led Linear Lighting Fixtures




● Led Ring / Curved Linear Light --- (Pendant mounted, Up and Down)

Features:

- Material:aluminum +PC diffuser, Up and down light.
- Customized Length and diameter 300-3000mm
- Profile color:silver,white,black,golden available
- Installation:pendant,wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate,so on.

Accessories:

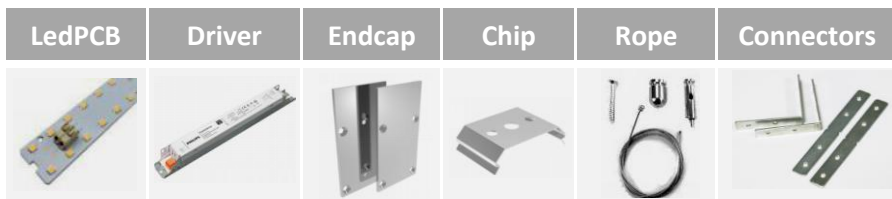

Specifications:

Item	GUS3560UD/GUSH90UD
Diameters	φ400/600/800/1000/1200/1500mm,customized
Led chip	SMD2835 / SMD5050
wattage	12/20/30/40/50/60W per meter
Beam angle	Down 100°, Up and down +100degree*2
CRI &Lumen flux	CRI≥80/90 & Lumen flux >80lm/W
Input	Light Strip DC24V,D36V; AC input 100-240V
Color Temperature	3000K,4000K, 6000K,RGB/RGBW
Life Span	30,000-35,000Hs


Item:

GUS3560UD


Diameter customized

GUSH90UD

Width/Diameter customized

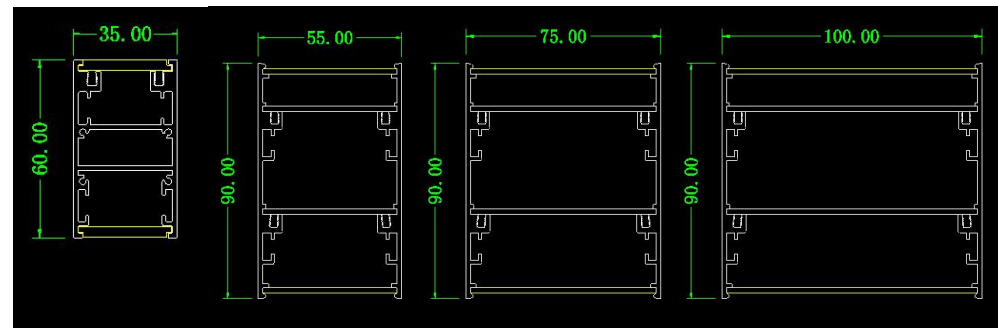

Installation Method:

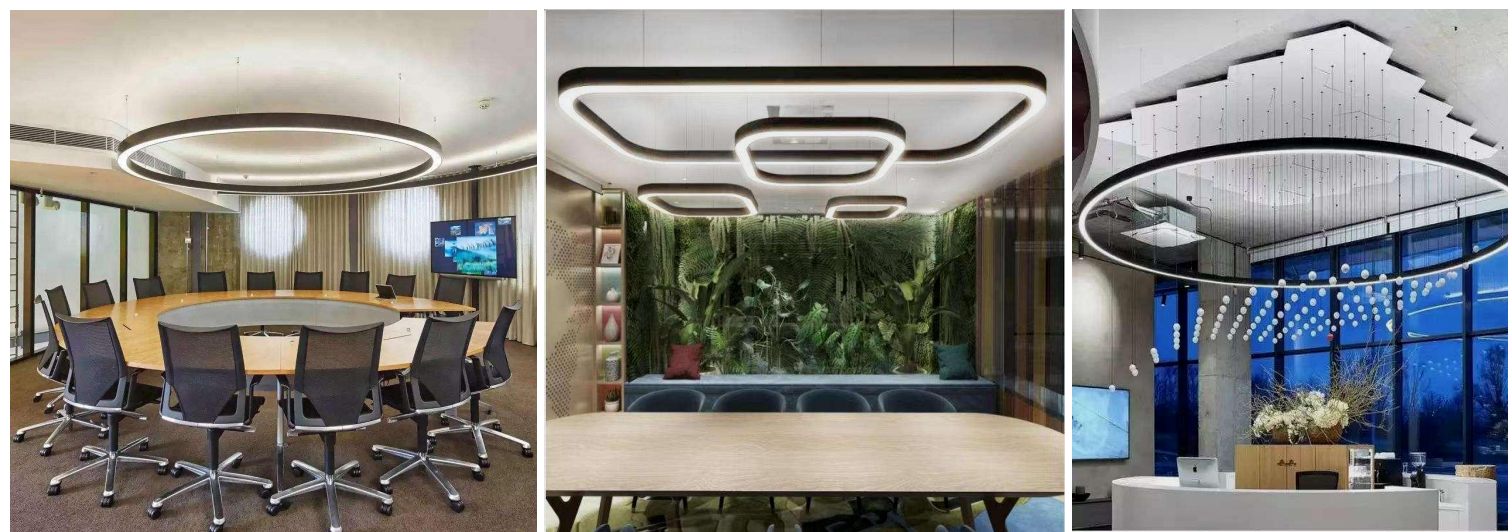

● Led Ring / Curved Linear Light --- (Recessed mounted)

Features:

- Material:aluminum +PC diffuser
- Customized Length and Diameter 300-3000mm
- Profile color:silver,white,black,golden available
- Installation:Recessed,wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate,so on.

Accessories:




Specifications:

Item	GUSH50
Diameters	φ400/600/800/1000/1200/1500mm,customized
Led chip	SMD2835 / SMD5050
wattage	12/20/30/40/50/60W per meter
Beam angle	PC cover , 100 degree
CRI &Lumen flux	CRI≥80 /90 & Lumen flux >80lm/W
Input	Light Strip DC24V,D36V; AC input 100-240V
Color Temperature	3000K,4000K, 6000K,RGB/RGBW
Life Span	30,000-35,000Hs

Item:

GUSH50

Width&diameter customized

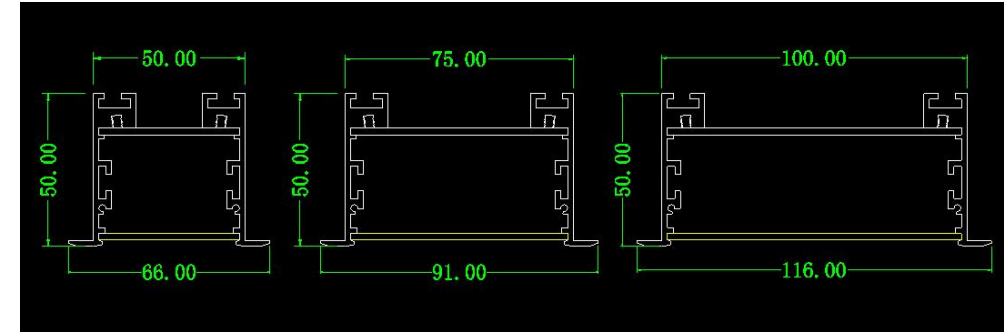

Installation Method:




● Round Ceiling Lights , Height 60~150mm --- (pendant,surface,Recessed mounted)

Features:

- Material:aluminum/Irom +PC diffuser
- Customized Diameters φ400-1200mm
- Profile color:silver,white,black, golden available
- Installation:pendant,recessed,wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate,so on.

Accessories:

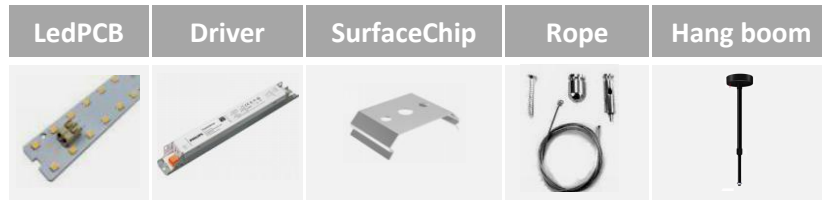


Specifications:

Item	GUSD400/500/600/600/800/900/1000/1200
Length	Diamter φ400/600/800/900/1000/1200mm
Led chip	SMD2835
wattage	10/20/30/40/50/60/80W
Beam angle	PC 100 degree
CRI &Lumen flux	CRI≥80 & Lumen flux >80lm/W
Input	Light bar DC24V,36V; AC100-240V
Color Temperature	3000K,4000K, 6000K,R/G/B
Life Span	30,000-35,000Hs

Item: GUSD300/400/500/600/800/900/1000/1200



Installation Method:



Colour Temperatures:




● Hexagon Ceiling Lights , Height 60~150mm--- (pendant,surface mounted)

Item: GUSD300/400/500/600/800/900/1000/1200


Features:

- Material:aluminum/Irom +PC diffuser
- ustomized Diameters \varnothing 300-900mm
- Profile color:silver,white,black, golden available
- Installation:pendant,recessed,wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate,so on.

Accessories:

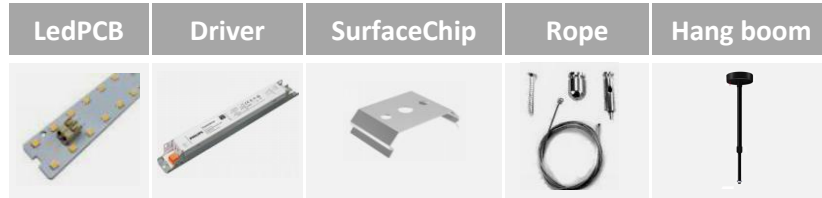

Installation Method:



Colour Temperatures:



Specifications:

Item	GUSD300/400/500/600/600/800/1000/1200
Length	Diamter \varnothing 400/600/800/900/1000/1200mm
Led chip	SMD2835
wattage	10/20/30/40/50/60/80W
Beam angle	PC 100 degree
CRI &Lumen flux	CRI \geq 80 & Lumen flux >80lm/W
Input	Light bar DC24V,36V; AC100-240V
Color Temperature	3000K,4000K, 6000K,R/G/B
Life Span	30,000-35,000Hs



● Square Ceiling Lights ,Height 60~150mm --- (pendant,surface mounted)

Item: GUS300/400/500/600/800/900/1000/1200

Features:


- Material:aluminum/Irom +PC diffuser
- ustomized Diameters each side lenght: L300-1200mm
- Profile color:silver,white,black, golden available
- Installation:pendant,recessed,wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate,so on.

Accessories:

LedPCB	Driver	SurfaceChip	Rope	Hang boom



Installation Method:




Colour Temperatures:



Specifications:

Item	Square/Rectangle shape
Length	Each side 300/400/600/800/1000/1200mm
Led chip	SMD2835
wattage	10/20/30/40/50/60/80W
Beam angle	PC 100 degree
CRI & Lumen flux	CRI≥80 & Lumen flux >80lm/W
Input	Light bar DC24V,36V; AC100-240V
Color Temperature	3000K,4000K, 6000K,R/G/B
Life Span	30,000-35,000Hs

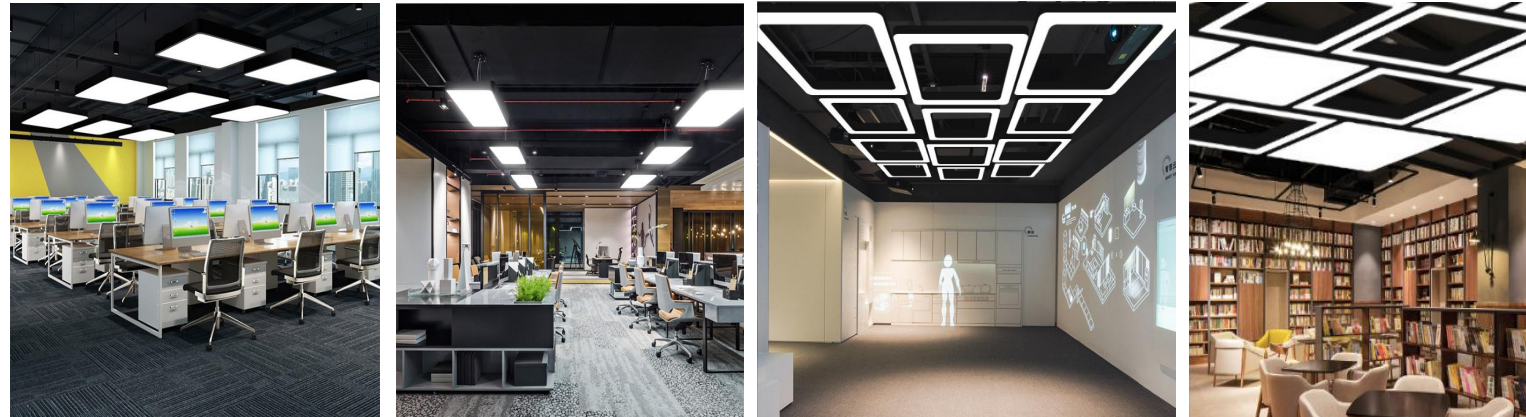

Office building seamless connected led Linear Lighting fixtures






WarmWhite



NatureWhite



CoolWhite

Red



Green




Blue



led Color Temperature




Woodgrain



Silver



White






Black



GOLD







Aluuminum
Profile Color

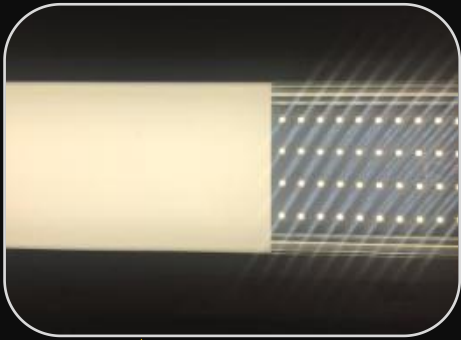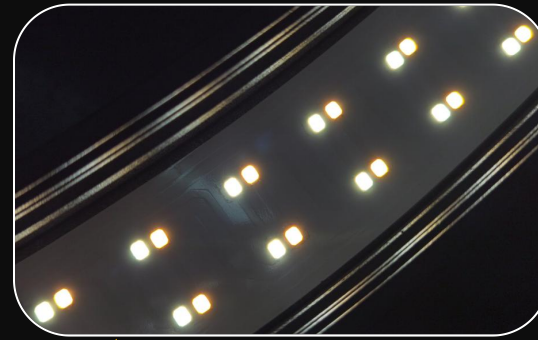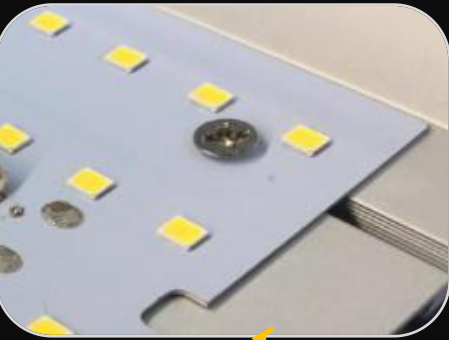

PRODUCT DETRIAL

Light source chip: Osram/Philips/Sumsung, etc.
Aluminum led PCBA fixed by screws,good heat dissipation. light soft, Anti-glare, no flicker,Easy installation and maintenance from completely parts and well designed

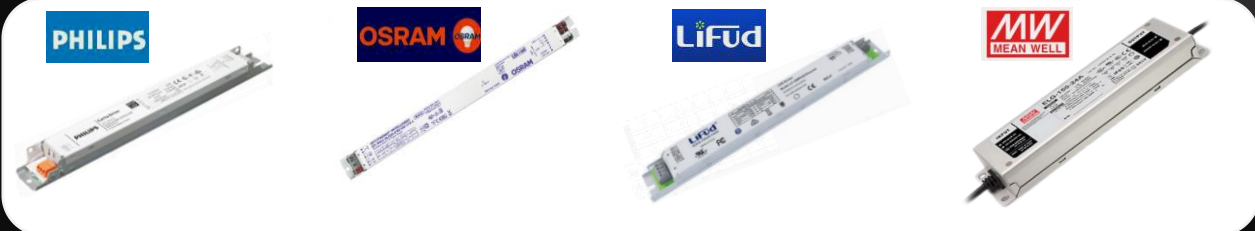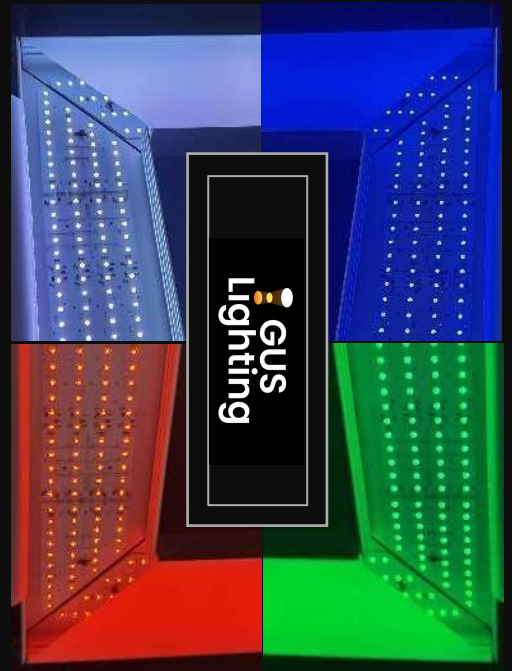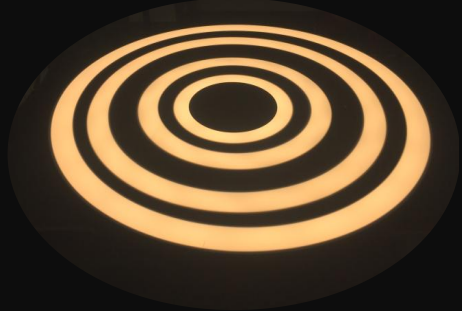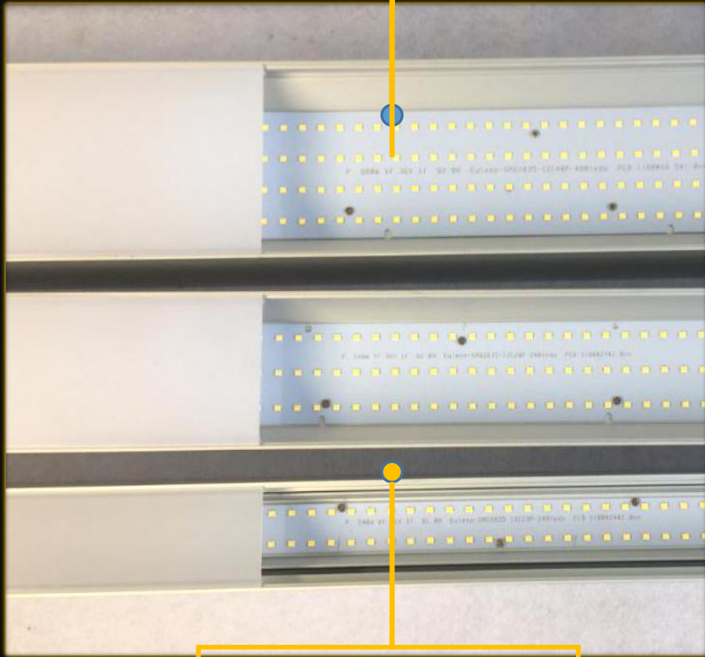

● Led Linear Light --- (pendant, recessed or wall surface mounted, built-in driver)

Features:

- Material: aluminum + PC diffuser
- Customized Length, 300-3000mm
- Profile color: silver, white, black, woodgrain available
- Installation: pendant, recessed, wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate, so on.



Accessories:





Specifications:

Item	GUS3370/GUS5570/GUS7570/GUS10070
Length	1000/1200/1500/2000/2400/2500/3000mm
Led chip	SMD2835
wattage	20/30/40/50/60 W/M
Beam angle	100 degree
CRI & Lumen flux	CRI ≥ 80/90 & Lumen flux > 80lm/W
Input	Light bar DC24V, 36V; AC100-240V
CCT	3000K, 4000K, 6000K, 3000K+6000K, RGB/RGBW
Life Span	30,000-35,000Hs



Item: GUS3370

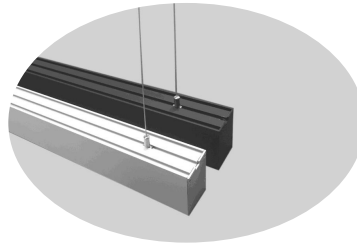



GUS5570

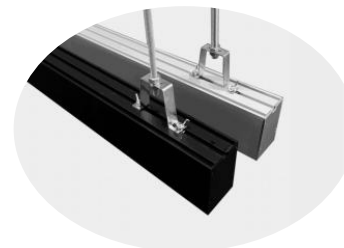

GUS7570

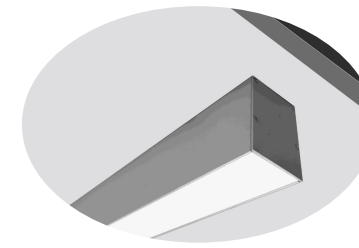


GUS10070

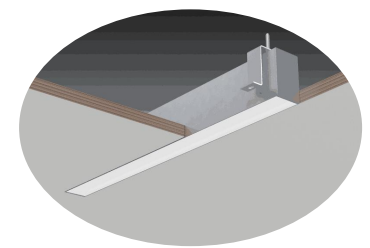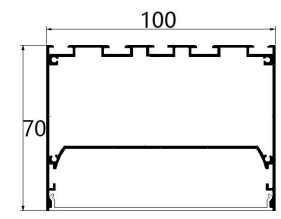

Installation Method:



Connected styles:

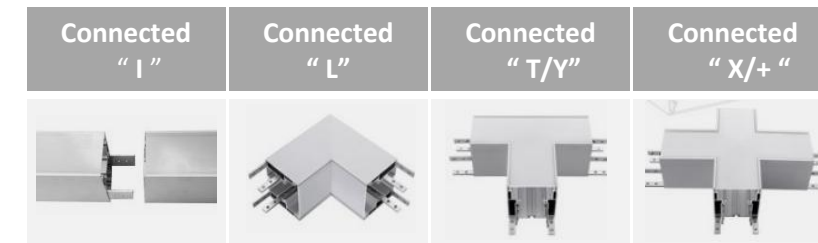

● Led Linear Light --- *DIY Shape Styles, seamless connection*

Item: GUS3370/5570/GUS7570/GUS10070


- Dimension(mm): EU5570(W55*H70), EU7570(W75*H70), EU10070(W100*H70)
- Standard Length: 300/600/900/1000/1200/1500/1800/2400/3000mm
- Profile Color: Silver, Black, White, Woodgrain
- Installation: pendant, surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- Shape Style: Rectangles, squares, triangles, hexagons, Y-shaped, V-shape, T-shapes, X-shapes, L-shapes, irregular shapes.

Specifications:

Length(mm)	300	600	900	1200	1500	1800	2400	3000
Wattage	10W	20W	30W	40W	50W	60W	80W	120W
CRI & Lumen flux	CRI≥80 & Lumen flux >80lm/W							
Input	Driver 100-277V; Light DC24 or DC36							
Color Temperature	3000K,4000K,6000K R/G/B,RGBW.							


Shapes Style :

Retangles		Squares		Hexagons	X/L/T - Shape	Y/V - Shape	Triangles
L400*1200mm	L600*1200mm	L600*600mm	L1200*1200mm	D400/600/800/1200mm	D400/600/800/1200mm	D400/600/800/1200mm	D400/600/800/1200mm

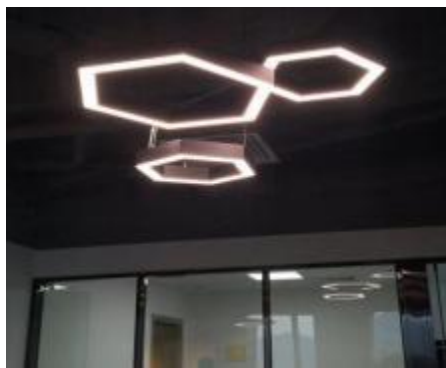

Connected styles & metals chips

180degrees-I



60degrees- V










90degree- L / T / X



120degree-V / Y



Connected styles



● Led Linear Light --- (Down / Up & Down emitting: pendant, wall surface mounted)

Features:

- Material:aluminum +PC (milky)
- Customized Length, 300-3000mm
- Profile color:silver,white,black, Woodgrain available
- Installation:pendant,wall or surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate,so on.

Accessories:

LedPCB	Driver	Endcap	Chip	Rope	Connectors

Specifications:




Item	GUS3385/GUS5575/GUS7575
Length	1000/1200/1500/2000/2400/2500/3000mm
Led chip	SMD2835
wattage	20/30/40/50/60 W/M
Beam angle	Down 100° , Up and down +100degree*2
CRI &Lumen flux	CRI≥80/90 & Lumen flux>80lm/W
Input	Light bar DC24V,36V; AC100-240V
CCT	3000K,4000K, 6000K, 3000K+6000K, RGB/RGBW
Life Span	30,000-35,000Hs

Item:

GUS3385UD

GUS5575D/UD


GUS7575D/UD

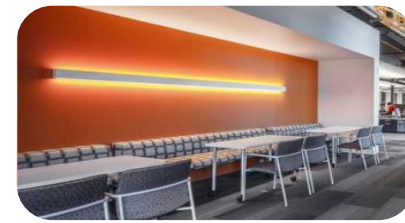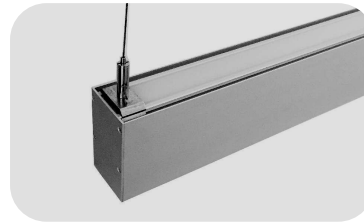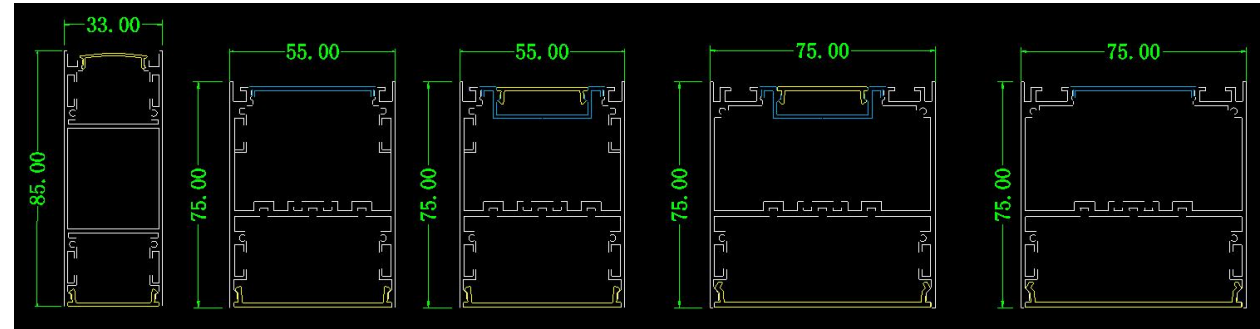

Installation Method:





Pendant	Wall mounted

Colourchanging:

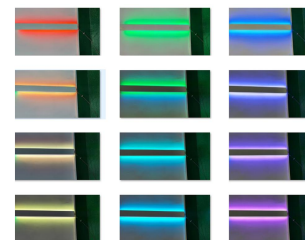

Connected styles:

Connected "I"	Connected "L"	Connected "T/Y"	Connected "X/+ "

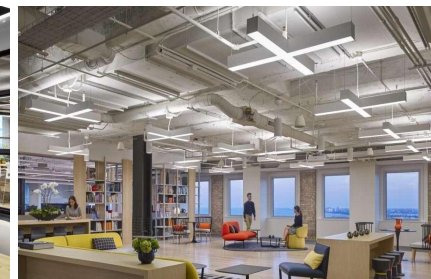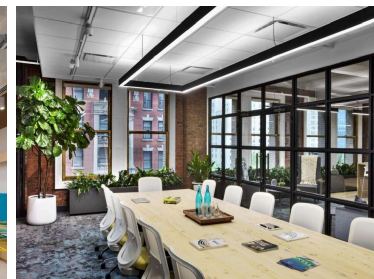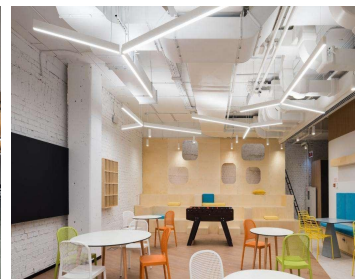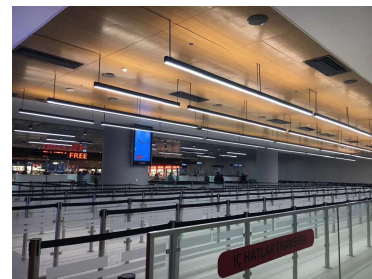



Up and down separated control:
RGB/RGBW /single white/ 3000K+6000K
turnable changing /dimmmable




● Led Linear Light --- (pendant, recessed or wall surface mounted, external driver)


Features:

- Material: aluminum + PC (milky)
- Customized Length, 300-3000mm
- Profile color: silver, white, black available
- Installation: pendant, recessed, wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate, so on.


Item: GUS3535




GUS5035



GUS7535

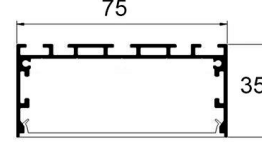


GUS10035

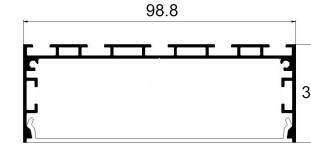


GUS12035



GUS15050

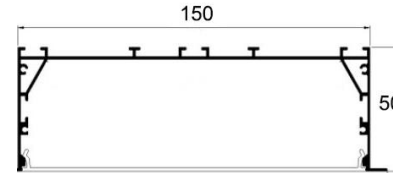

GUS20040

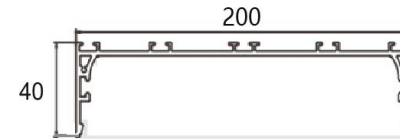


Accessories:




Specifications:

Item	GUS3535/GUS5035/7535/GUS10035/GUS12035/ GUS15050 /GUS20040
Length	1000/1200/1500/2000/2400/2500/3000mm
Led chip	SMD2835
wattage	20/30/40/50/60 W/M
Beam angle	100 degree
CRI & Lumen flux	CRI ≥ 80/90 & Lumen flux > 80lm/W
Input	Light bar DC24V, 36V; AC100-240V
CCT	3000K, 4000K, 6000K, 3000K+6000K, RGB/RGBW
Life Span	30,000-35,000Hs

Installation Method:

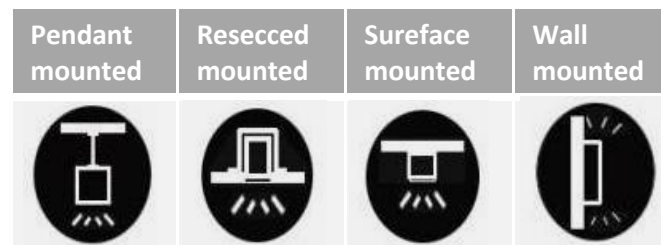

Connected styles:

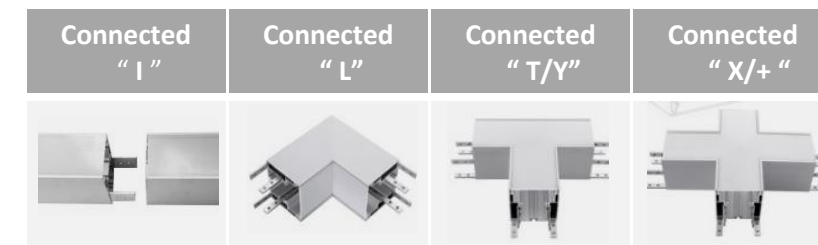



● Led Linear Light --- (recessed or wall mounted, external driver)




Features:

- Material:aluminum +PC (milky)
- Customized Length, 300-3000mm
- Profile color:silver,white,black available
- Installation:pendant,recessed,wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate,so on.

Accessories:



Item: GUS5035R GUS6535 GUS9035 GUS11535 GUS13535

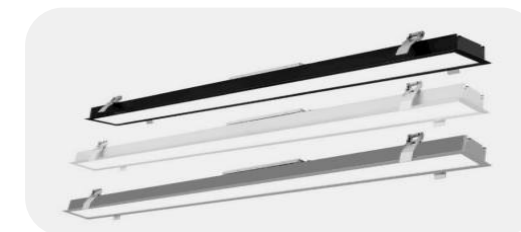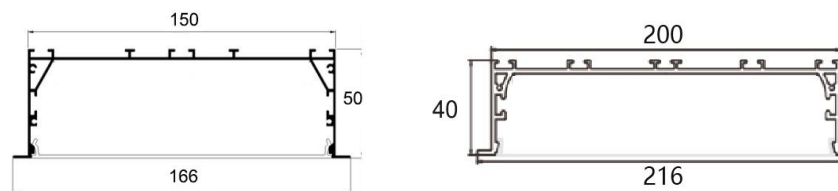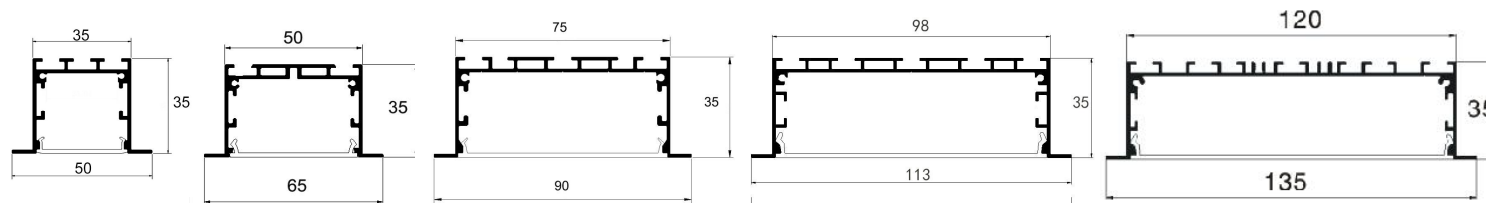



Specifications:

Item	GUS5035R GUS6535	GUS9035 GUS11535	GUS13535
Length	1000/1200/1500/2000/2400/2500/3000mm		
Led chip	SMD2835		
wattage	20/30/40/50/60 W/M		
Beam angle	100 degree		
CRI &Lumen flux	CRI≥80/90 & Lumen flux>80lm/W		
Input	Light bar DC24V,36V; AC100-240V		
Color Temperature	3000K,4000K, 6000K, 3000K+6000K, RGB/RGBW		
Life Span	30,000-35,000Hs		

Installation Method:



Connected styles:

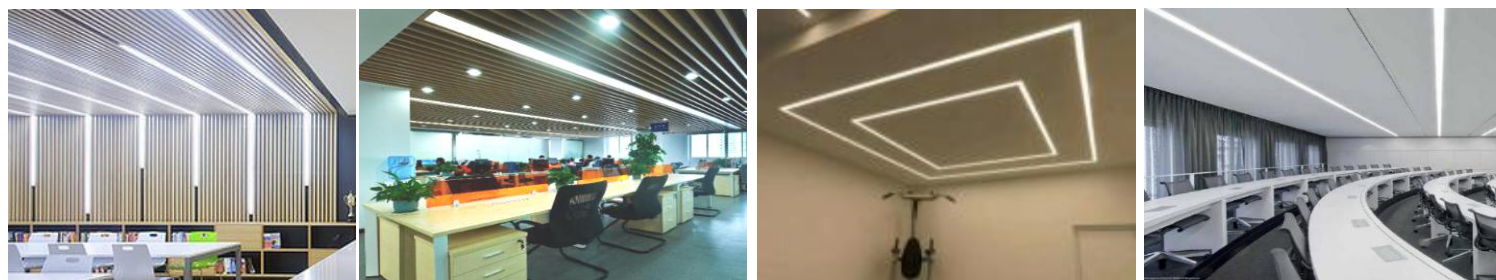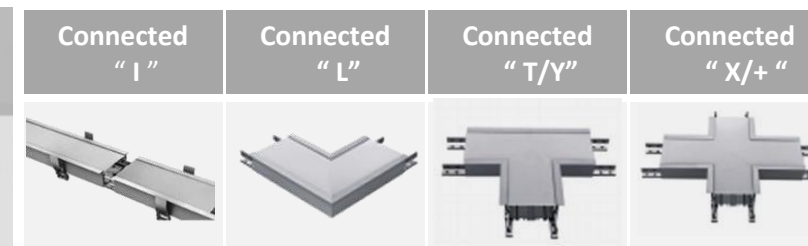




**Garage / 4S shop / Commercial Supermarket
underground parking lot led Linear Lighting fixtures**

● Led Linear Light --- U Shape PC cover

Features:

- Material:aluminum +PC (milky)
- Customized Length, 300-3000mm
- Profile color:silver,white,black available
- Installation:pendant,wall surface mounted
- Dimmable: Triac dimming, 0-10V or Dali dimming,Microwave sensor
- General use: office light, commercial shop light, hotel light, station light, exhibition light, school light, supermarket light, home decorate,so on.


Accessories:

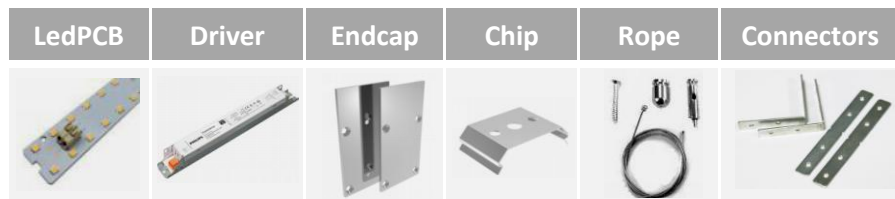


Specifications:

Item	GUS3573U/GUS5050U/GUS5075U/GUS7550U
Length	1000/1200/1500/2000/2400/2500/3000mm
Led chip	SMD2835
wattage	20/30/40/50/60 W/M
Beam angle	270 degree
CRI &Lumen flux	CRI≥80/90 & Lumen flux>80lm/W
Input	Light bar DC24V,36V; AC100-240V
Color Temperature	3000K,4000K, 6000K, 3000K+6000K, RGB/RGBW
Life Span	30,000-35,000Hs


Item: GUS3573U





GUS5050U




GUS5075U

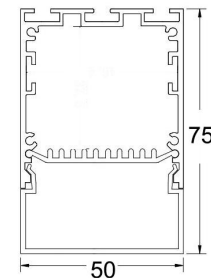

GUS7550U

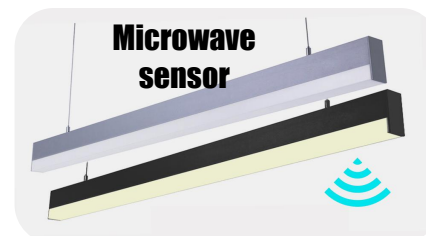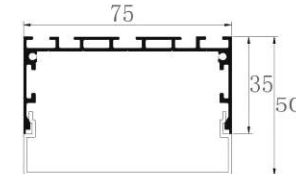

Installation Method:

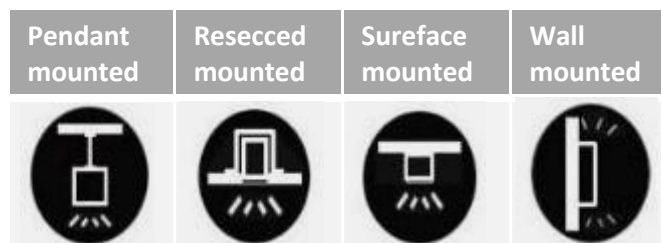


Connected styles:



Energy saving: control the lightness of the led lights by microwave sensor.100% brightness when there something moving, and 10% brightness without anything moving.




**U Shape Cover
Linear Lights**

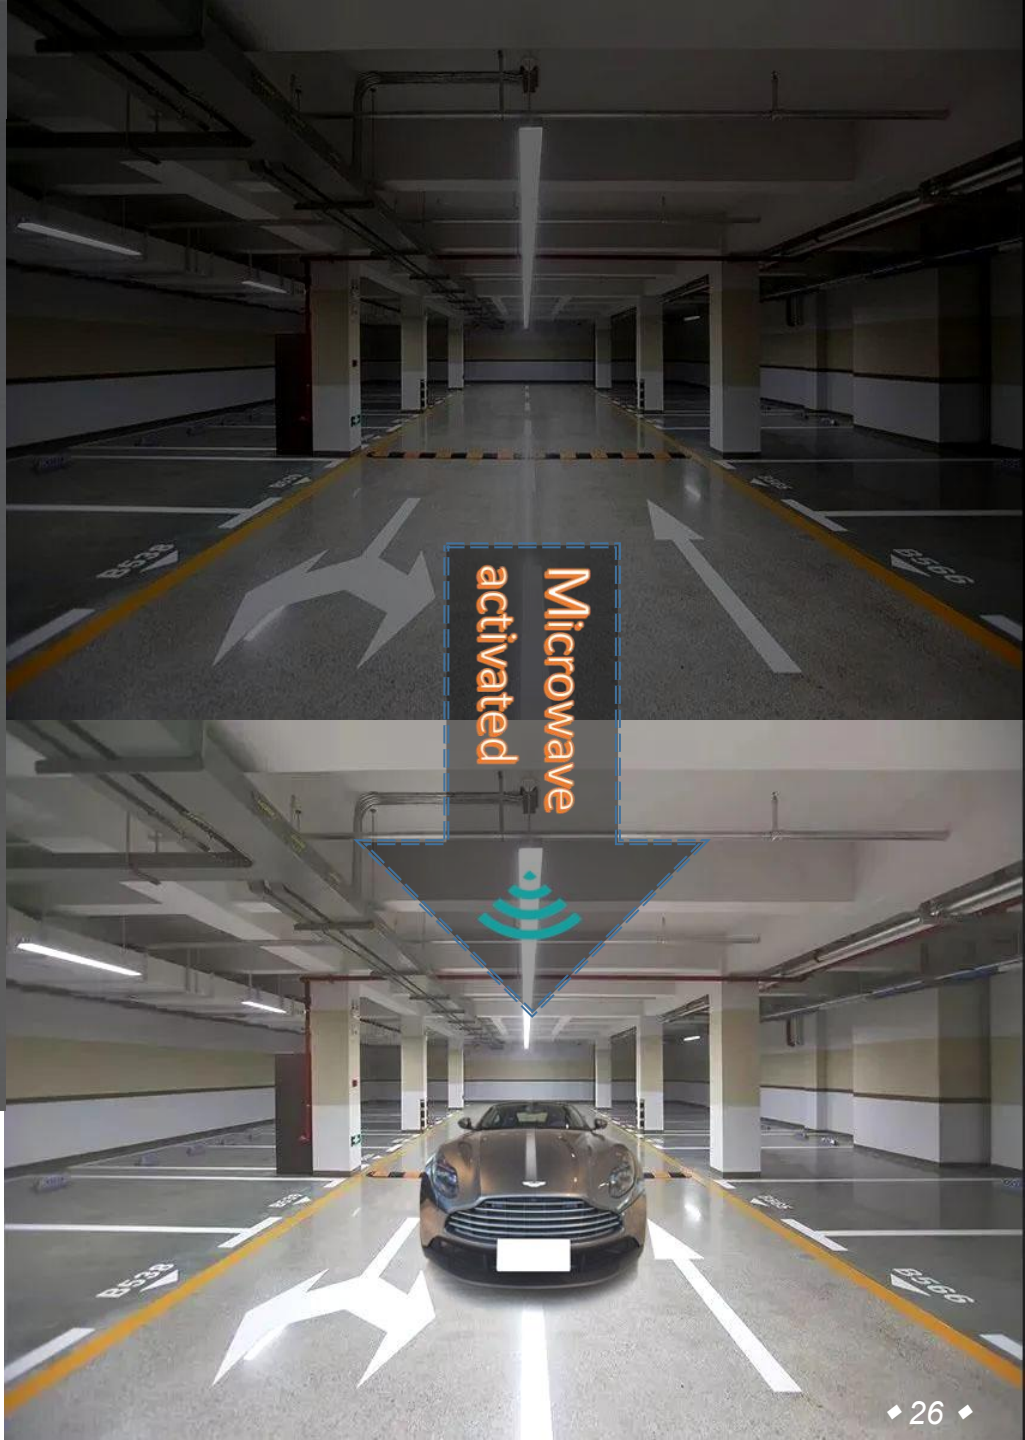

● Led Cabinet Light --- Linkable linear light

Item: GUS3007/GUS3909

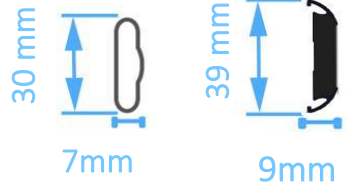

Features:

- Material:aluminum +PC cover (clear or milkly)
- Installation:surface mounting (with Clip screw, magnet, 3M adhesive tape)
- Customized Length, 300-3000mm
- Profile color:silver,white,black available
- Switch: built-in or external on/off, touch,PIR/IR sensor switch available
- General use: cabinet,showcase,wardrobe,furniture decoration, so on.

Specifications:

Length	300mm	500mm	600mm	1000mm	1200mm
wattage	4W	6W	8W	14W	18W
CRI &Lumen flux	CRI≥80 & Lumen flux >80lm/W				
Input	DC12V or DC 24				
Dimension	W30*H7mm				
Color Temperature	Warm white/3000K,Natural white/4000K,Cool white/6000K				



Conectors:

- 2 Ways to connect the lights: Connectors Or Cables
- Linkable style:series or paralled conection by junction box
- 2~12PCS lighs linkable

Switch Options:

Button	Knob	RF Control	Touch	IR sensor	PIR sensor	On-off
dimmable					No dimmable	

● Led Cabinet Light --- Led Puck Light With Magnetic

Item: GUS7015A



GUS7015B



GUS7014A



GUS6008/7008



GUS6814



Features:

- Material:aluminum with magnetic +PMMA/PC
- Installation:surface / recessed mounting
- Profile color:silver,white,black available
- Switch: external on/off, touch,PIR/IR sensor switch available
- General use: cabinet,showcase,wardrobe,furniture decoration, so on.

Specifications:

Item	GUS7015A/B GUS7014A/GUS7008
SMD2835 leds	18
wattage	1.5-3W
CRI &Lumen flux	CRI≥80 & Lumen flux >80lm/W
Input	DC12V
Dimension	W75*H14mm/,W70*H15mm
Color Temperature	3000K,4000K,6000K,RGB

Retail Package:



Conectors:

- Linkable style: by junction box
- 2~12PCS lights linkable

Switch Options:


Button	Knob	RF Control	Touch	IR sensor	PIR sensor	On-off
dimmable					No dimmable	





● **Led Cabinet Light --- Wardrobe Linear Light**

Item: GUS1834

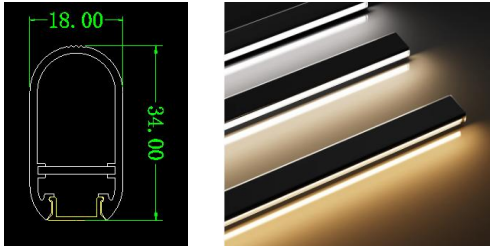

Sensor Switch Effect:

- Switch: built-in or external on/off, touch,PIR/IR sensor switch available
- Touch switch:The light works when the finger touch -dimmable
- IR Sensor switch:The light works when the door open or hand wave -dimmable
- PIR Sensor switch:The light works when the body enters within 3M(Max) range, light up 30-60secs.
- General use: cabinet,showcase,wardrobe,furniture decoration, so on.

Features:

- Material:aluminum +PC cover (clear or milkly)
- Installation:surface mounting (with Clip screw, magnet, 3M adhesive tape)
- Customized Length, 300-3000mm
- Profile color:silver,white,black available
- Switch: built-in or external on/off, touch,PIR/IR sensor switch available
- General use: cabinet,showcase,wardrobe,furniture decoration, so on.

Specifications:

Length	300mm	500mm	600mm	1000mm	1200mm
wattage	4W	6W	8W	14W	18W
CRI &Lumen flux	CRI≥80 & Lumen flux >80lm/W				
Input	DC12V or DC 24				
Color Temperature	3000K,4000K,6000K,RGB				




● **Led Cabinet Light --- linear strip lights**


Item: GUS1506




GUS1616

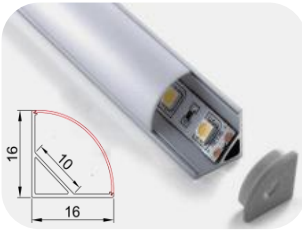


GUS2206

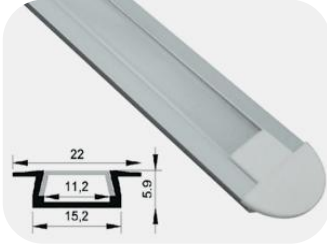


GUS1818

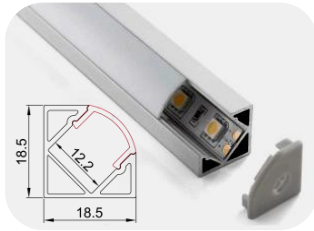


GUS1707

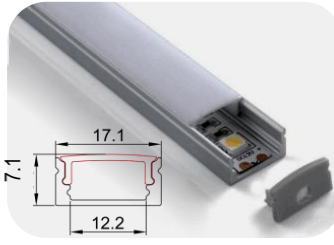


GUS1919

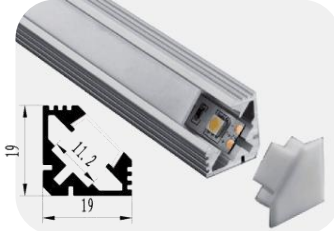


GUS2507

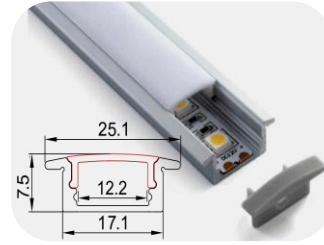


GUS2212




GUS2310




GUS1715

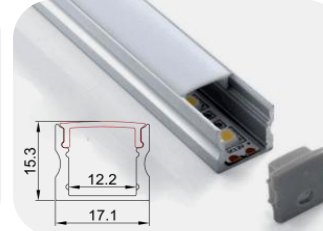


GUS3010



GUS2515

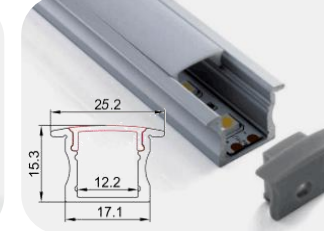

GUS1612

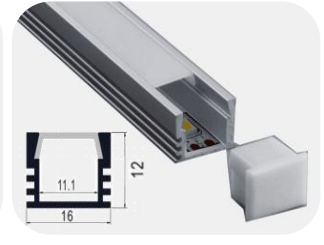

Features:

- Material:aluminum +PC (clear or milky)
- Installation:Surface/ Recessed mounted
- Customized Length, 300-3000mm
- Profile color:silver,white,black available

Specifications:

Length	300mm	500mm	600mm	1000mm	1200mm
wattage	4W	6W	8W	14W	18W
CRI &Lumen flux	CRI≥80 & Lumen flux >80lm/W				
Input	DC12V or DC 24				
Color Temperature	3000K,4000K,6000K,RGB				

Sensor Switch Effect:

- Switch: built-in or external on/off, touch,PIR/IR sensor switch available
- Touch switch:The light works when the finger touch -dimmmable
- IR Sensor switch:The light works when the door open or hand wave -dimmmable
- PIR Sensor switch:The light works when the body enters within 3M(Max) range, light up 30-60secs.
- General use: cabinet,showcase,wardrobe,furniture decoration, so on.

